



Olefin

Series

تائیدیه‌های سری اولفین

Laboratory standards
and certifications

 Kiliet.co

 info@kiliet.com 

www.kiliet.com



WWW.Kiliet.com

Laboratory Standards & Certifications

استاندارد تاثیر بر صدا

Sound absorption level

استاندارد تغییر رنگ

Color Fastness

استاندارد جذب صدا

Impact sound insulation

استاندارد مقاومت حرارتی

Thermal resistance

استاندارد آنتی استاتیک

Static Propensity

استاندارد تغییر ابعاد

dimensional Stability

استاندارد شعله وری

Flammeability

استاندارد محیط زیست

VOC Emission

استاندارد نور تابشی

Critical Radiant Flux

3/8A



COMMERCIAL TESTING COMPANY

1215 South Hamilton Street • Post Office Box 985 • Dalton, GA 30722
Telephone (706) 278-3935 • Facsimile (706) 278-3936

Report Number 07-08302

Standard Carpets Ind. LLC
Sharjah, U.A.E.

Test Number 3926-9674
August 24, 2007

Electrostatic Propensity

Test Method: The test was conducted in accordance with the AATCC Test Method 134, *Electrostatic Propensity of Carpets*. The purpose of the test is to assess the static propensity of carpets under controlled laboratory conditions simulating those that may exist in actual installations. The most important factors in determining the static charge are: (1) the basic natures of the two materials being rubbed together or separated, i.e., shoe soles and carpet; (2) surface contamination on either; (3) the nature of the rubbing or separation, i.e., stepping or scuffing; and, (4) the ambient atmospheric contains. A sample is conditioned at 70°F and 20% relative humidity and the static properties characterized by performing the following tests:

- TEST I — The step test is performed by wearing AATCC TM 134 test sandals with Neolite™ soles and heels and walking on the carpet for one minute.
- TEST II — The scuff test is conducted by scuffing or wiping in a backward motion for one minute wearing test sandals with Neolite™ soles and heels.
- TEST III — The step test is performed by wearing test shoes with chrome tanned leather soles and heels and walking on the carpet for one minute.
- TEST IV — The scuff test is conducted by scuffing or wiping in a backward motion for one minute wearing test shoes with chrome tanned leather soles and heels.

Material Tested:

Identification: Graphics A
Construction: Loop Pile Carpet Tile
Secondary Backing: Vinyl

Test Conditions:

Environmental: 21.7°C, 20.8% RH
Underlayment: None
Shampoo: None

Test Result:

Test Mode	Polarity	Voltages
Test I — Step	negative	0.2 kV
Test II — Scuff	positive	0.3 kV
Test III — Step	negative	0.7 kV
Test IV — Scuff	negative	1.0 kV

Classification: A carpet classified in accordance with the CRI *Carpet Specifiers Handbook*, Appendix A, Carpet Test Methods and Suggested Physical Requirements, page 72, is suitable for residential use if the maximum voltage is 5.0 kV, and suitable for commercial use if the maximum voltage is 3.5 kV.

Commercial Testing Company

Denare Jackson

(Authorized Signature)

This report is provided for the exclusive use of the client to whom it is addressed. It may be used in its entirety to gain product acceptance from duly constituted authorities. The test results presented in this report apply only to the samples tested and are not necessarily indicative of apparent identical or similar materials. Sample selection and identification were provided by the client. A sampling plan, if described in the referenced standard, was not necessarily followed. This report, in the name of Commercial Testing Company, shall not be used under any circumstance in advertising to the general public.

TESTED TO BE SURE® Since 1974

Mystique - PP

Page 1 of 2

WWW.Kiliet.com

Kiliet

Standard Carpets

4/8A

**COMMERCIAL TESTING COMPANY**1215 South Hamilton Street • Post Office Box 985 • Dalton, GA 30722
Telephone (706) 278-3935 • Facsimile (706) 278-3936

Report Number 07-08299


Standard Carpets Ind. LLC
Sharjah, U.A.E.Test Number 3924-9578
August 24, 2007**Accelerated Soiling**

Test Method: The material was tested in accordance with ASTM International Test Method D 6540-00, *Accelerated Soiling of Pile Yarn Floor Covering*, a procedure for assessing the propensity of pile yarn floor coverings to soiling in the absence of abrasive wear and texture changes, using a standard synthetic soil composition. It is applicable for use in testing unused pile yarn floor covering; it is not applicable for use in testing used floor covering. This test method will provide a uniformly soiled test specimen to evaluate and has been found to give results similar to the actual floor service soiling. However, its use is recommended only as a screening test method and not as a replacement for floor testing. The acceptance criteria of this method is set by mutual agreement between the purchaser and supplier. The carpet test specimens are secured to a backing sheet mounted inside a drum with the pile surface exposed, and are subjected to an accelerated soiling process. The degree of soiling is measured or assessed by comparing the change in color between soiled and original pile yarn floor covering using AATCC Evaluation Procedure 1, (Jumbo) Gray Scale for Color Change, a numeric rating process using AATCC terminology for Subjective Rating Processes where 5 = negligible or no change in color, 4 = slight change, 3 = noticeable change, 2 = considerable change, and 1 = much change in color.

Material Tested:Identification: Graphics A
Construction: Loop Pile Carpet Tile
Secondary Backing: Vinyl**Test Result:**

Average Rating — 3-4

Commercial Testing Company


(Authorized Signature)

This report is provided for the exclusive use of the client to whom it is addressed. It may be used in its entirety to gain product acceptance from duly constituted authorities. The test results presented in this report apply only to the samples tested and are not necessarily indicative of apparent identical or similar materials. Sample selection and identification were provided by the client. A sampling plan, if described in the referenced standard, was not necessarily followed. This report, or the name of Commercial Testing Company, shall not be used under any circumstance in advertising to the general public.

TESTED TO BE SURE® Since 1974

Mysliwiec - PP

Page 2 of 2

WWW.Kiliet.com

Independent Textile
Testing
Service, Inc.

Test No: 193591

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@ittslab.com

Test Report

Customer: Standard Carpets Ind. LLC

January 7, 2019

Subject: Sample(s) of carpet submitted for testing by the customer and identified below:

Sample Identification: Quality Name: Midlands
100% Solution Dyed Olefin Carpet Tile with PVC BackingTest Method Conducted
AATCC 134-2011
Electrostatic Propensity of Carpets

Purpose and Scope

This test method is designed to assess the static generating propensity of carpets developed when a person walks across them by controlled laboratory simulation of conditions which may be met in practice, and more particularly, with respect to those conditions which are known from experience to be strongly contributory to excessive accumulation of static charges.

Test Conditions:

Chamber Temperature: 70° F.

Chamber Relative Humidity: 20%


Test Results:	Sole	Underlay	Maximum Voltage 1 (kV)	Maximum Voltage 2 (kV)	Averages (kV)
Test I Step Test	Neolite	Plate	Neg. 0.3	Neg. 0.3	Neg. 0.3
Test II Scuff Test	Neolite	Plate	Neg. 0.1	Neg. 0.2	Neg. 0.2
Test III Step Test	Leather	Plate	Neg. 0.1	--	--
Test IV Scuff Test	Leather	Plate	Neg. 0.1	--	--

Soles:

- a) Neolite XS 664
- b) Suede Leather

Underlayment:

- a) Plate: Earth grounded metal plate
- b) H/J: Standard 40 oz./yd2 rubberized Hair/Jute cushion



President L. Kent Suddeth

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

Page 1 of 1

Page 1 of 1

WWW.Kiliet.com

Kiliet

Standard Carpets



Mr. Upendra R. Oza
STANDARD CARPETS IND LLC
Industrial Area no.1 PO Box 27977
AE- SHARJAH
VERENIGDE ARABISCHE EMIRATEN

your delivery of
2009-05-12

your reference

our reference
PW/5484


date
Zwijnaarde, 2009-06-11

Analysis Report 68886

Required tests :

Determination of the electrical resistance
Assessment of static electrical propensity - walking test
Determination of sound absorption
Determination of impact sound insulation
Determination of thermal resistance by the guarded hot plate apparatus

Identification number	Information given by the client	Date of receipt
T905007	FRS Loop Pile Polypropylene Carpet Tile (Tetris)	2009-05-12


Petra Wittevrinkel
order responsible

For further information, please contact our sectorial adviser Jo Wynendaele

This report runs to 6 pages and may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel.
The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples.

ISO 17025



VAT BE 0459.218.289
CENTEXBEL-GENT
Technologiepark 7
BE-9052 Zwijnaarde
Tel. + 32 9 220 41 51 • Fax + 32 9 220 49 55
e-mail gent@centexbel.be

Fin. Acc. 210-0472965-45

IBAN BE44 2100 4729 6545

CENTEXBEL-BRUSSELS
Montoyerstraat 24 B2
BE-1000 Brussels

Tel. + 32 2 287 08 30 • Fax + 32 2 230 68 15

www.centexbel.be

Page 1 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference date page
PW/5484 2009-06-11 2 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of the electrical resistance

1. Method:

Applied standard : ISO 10965 (year: 1998)
Deviations of the standard : -
Testing atmosphere : 23°C and 25 % relative humidity
Applied voltage : 500 Volt
Number of specimens : 3
Number of measurements : 6 (2 measurements per specimen)

2. Results:

Date of ending the test: 25-05-2009

test specimen	surface resistance in Ω	vertical resistance in Ω
1	$1,67 \times 10^{12}$	$9,43 \times 10^{11}$
2	$5,00 \times 10^{12}$	$1,35 \times 10^{12}$
3	$5,00 \times 10^{12}$	$1,28 \times 10^{13}$
4	$3,33 \times 10^{12}$	$6,58 \times 10^{11}$
5	$4,55 \times 10^{12}$	$1,28 \times 10^{12}$
6	$2,50 \times 10^{12}$	$1,25 \times 10^{12}$
geometrical mean value	$3,41 \times 10^{12} \Omega$	$1,61 \times 10^{12} \Omega$

Performed in the physical lab under the responsibility of Petra Wittevrongel.

www.centexbel.be

Page 2 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference date page
PW/5484 2009-06-11 3 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Assessment of static electrical propensity - walking test

1. Method:

Applied standard : ISO 6356 (year: 2000)
method by walking
Deviations of the standard : dimensions of the carpet 200 cm x 100 cm (assembly of 8
pieces of 50 cm x 50 cm)
Atmosphere for conditioning : 23°C and 25% relative humidity
Conditioning time : at least 7 days
Number of measurements : 3

2. Results:

Date of ending the test: 25-05-2009

body voltage (kVolts)	
measurement	with Neolite sole
1	0.0
2	0.1
3	0.2
average	0.1

Performed under accreditation in the physical lab under the responsibility of Philippe Lemaire.

www.centexbel.be

Page 3 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	4 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of sound absorption

1. Method:

Performed in the external lab : Schall- und Wärmemeßstelle Aachen GmbH

2. Results:

Date of ending the test : 27-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.



Analysis Report 68886

our reference

date

page

PW/5484

2009-06-11

5 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of impact sound insulation1. Method:

Performed in the external lab : Schall- und Wärmemeßstelle Aachen GmbH

2. Results:

Date of ending the test : 27-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.

www.centexbel.be

Page 5 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	6 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of thermal resistance by the guarded hot plate apparatus

1. Method:

Performed in the external lab : Ghent University, Faculty of Engineering (Department of Textiles)

2. Results:

Date of ending the test : 29-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.

**Schall- und Wärmemeßstelle Aachen GmbH**

Institut für schalltechnische und wärmetechnische Prüfungen - Beratung - Planung

SWA GmbH

Im Grüntal 22 · 52 066 Aachen

Telefon (0241) 970 220

Telefax (0241) 572 956

Geschäftsführung:

Dipl.-Ing. Bernd Gebing

Dr.-Ing. Lothar Siebel

Amtsgericht Aachen · HRB 2708

Labor: Hauptstr. 133 · 52 477 Alsdorf

VIMPA Schallschutzprüfstelle DIN 4109
Staatlich anerkannte Sachverständige
für den Schall- u. Wärmeschutz IK-Bau NRWBankverbindung: Sparkasse Aachen
(BLZ 390 500 00) Kto.-Nr. 11 011 194

27.05.2009

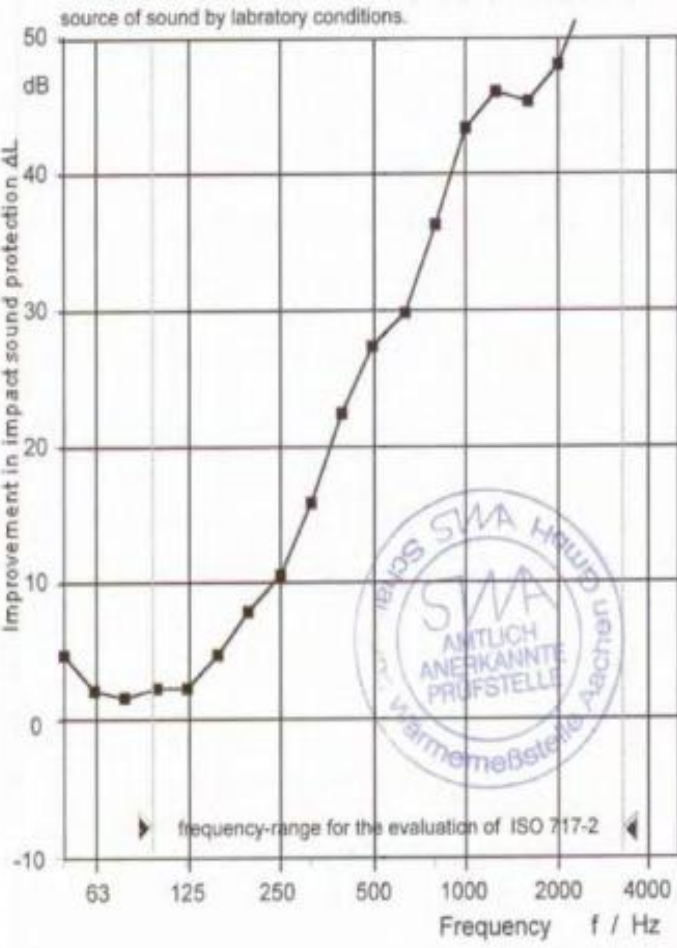


TEST REPORT NO. : CT190509B TS**Impact sound insulation of ISO 140-8 : 1998 - 03**

Date of test: 19.05.2009

Customer: CENTEXBEL

Tested material: T905007

laid loose on a 140 mm thick reinforced concrete floor slab

Test results		Enclosure TS																																																																					
Impact sound insulation of ISO 140-8 : 1998 - 03		Page 2 of 2																																																																					
Measurement of impact sound insulation by a floor covering - on a solid strings-floor																																																																							
Customer: CENTEXBEL																																																																							
Tested material: T905007 Test rooms: 02 u. K2, Hauptstraße 133, 52 477 Alsdorf Test area: 4,24 m x 4,15 m Test area of slab Date of test: 19.05.2009																																																																							
Description of the test material: Total thickness: - mm Mass / area: - kg/m ² laid loose on a 140 mm thick reinforced concrete floor slab																																																																							
Receiving room: Volume: 58,9 m ³ Temperature: 20 °C Humidity: 65 %																																																																							
The results are based on tests, which were effected with on artificial source of sound by laboratory conditions.																																																																							
<table border="1"> <thead> <tr> <th>Frequency</th> <th>Ln</th> <th>ΔL</th> </tr> <tr> <th>Hz</th> <th>Bare floor</th> <th>dB</th> </tr> </thead> <tbody> <tr><td>50</td><td></td><td>4,9</td></tr> <tr><td>63</td><td></td><td>2,3</td></tr> <tr><td>80</td><td></td><td>1,8</td></tr> <tr><td>100</td><td>61,0</td><td>2,5</td></tr> <tr><td>125</td><td>61,4</td><td>2,4</td></tr> <tr><td>160</td><td>64,8</td><td>4,9</td></tr> <tr><td>200</td><td>63,7</td><td>8,0</td></tr> <tr><td>250</td><td>65,4</td><td>10,7</td></tr> <tr><td>315</td><td>65,6</td><td>16,0</td></tr> <tr><td>400</td><td>66,1</td><td>22,4</td></tr> <tr><td>500</td><td>66,0</td><td>27,3</td></tr> <tr><td>630</td><td>66,4</td><td>29,8</td></tr> <tr><td>800</td><td>66,3</td><td>36,4</td></tr> <tr><td>1000</td><td>66,2</td><td>43,4</td></tr> <tr><td>1250</td><td>66,6</td><td>46,0</td></tr> <tr><td>1600</td><td>67,2</td><td>45,3</td></tr> <tr><td>2000</td><td>67,1</td><td>47,9</td></tr> <tr><td>2500</td><td>67,0</td><td>53,7</td></tr> <tr><td>3150</td><td>66,4</td><td>54,2</td></tr> <tr><td>4000</td><td></td><td>---</td></tr> <tr><td>5000</td><td></td><td>---</td></tr> </tbody> </table>	Frequency	Ln	ΔL	Hz	Bare floor	dB	50		4,9	63		2,3	80		1,8	100	61,0	2,5	125	61,4	2,4	160	64,8	4,9	200	63,7	8,0	250	65,4	10,7	315	65,6	16,0	400	66,1	22,4	500	66,0	27,3	630	66,4	29,8	800	66,3	36,4	1000	66,2	43,4	1250	66,6	46,0	1600	67,2	45,3	2000	67,1	47,9	2500	67,0	53,7	3150	66,4	54,2	4000		---	5000		---	 Improvement in impact sound protection ΔL dB Frequency f / Hz frequency-range for the evaluation of ISO 717-2	
Frequency	Ln	ΔL																																																																					
Hz	Bare floor	dB																																																																					
50		4,9																																																																					
63		2,3																																																																					
80		1,8																																																																					
100	61,0	2,5																																																																					
125	61,4	2,4																																																																					
160	64,8	4,9																																																																					
200	63,7	8,0																																																																					
250	65,4	10,7																																																																					
315	65,6	16,0																																																																					
400	66,1	22,4																																																																					
500	66,0	27,3																																																																					
630	66,4	29,8																																																																					
800	66,3	36,4																																																																					
1000	66,2	43,4																																																																					
1250	66,6	46,0																																																																					
1600	67,2	45,3																																																																					
2000	67,1	47,9																																																																					
2500	67,0	53,7																																																																					
3150	66,4	54,2																																																																					
4000		---																																																																					
5000		---																																																																					
Reception filter: third-octave Calculation according ISO 717-2:																																																																							
Impact sound improvement index $\Delta L_w = 24 \text{ dB}$ (VM = 24 dB)	non rated reduction of impact sound insulation $\Delta L_{lin} = \Delta L_w + C_{L\Delta}$ $\Delta L_{lin} = 12 \text{ dB}$	$C_{L\Delta} = -12 \text{ dB}$ $C_{Lr} = 1 \text{ dB}$ $C_{Lr,50-2500} = 4 \text{ dB}$																																																																					
Test report no.: CT190509B TS Aachen 27.05.2009	SWA Schall- und Wärmemeßstelle Aachen GmbH  (Dipl.-Ing. A. Seibel)  (Dipl.-Ing. L. Seibel)																																																																						

**Schall- und Wärmemeßstelle Aachen GmbH**

Institut für schalltechnische und wärmetechnische Prüfungen - Beratung - Planung

SWA GmbH

Im Gröntal 22 - 52 066 Aachen

Telefon (0241) 979 220

Telefax (0241) 572 956

Geschäftsführung:

Dipl.-Ing. Bernd Gebing

Dr.-Ing. Lothar Siebel

Amtsgericht Aachen - HRB 2708

Labor: Hauptstr. 133 - 52 477 Alsdorf

VMPA Schallschutzprüfstelle DIN 4109

Staatlich anerkannte Sachverständige

für den Schall- u. Wärmeschutz im Bau NRW

Bankverbindung: Sparkasse Aachen

(BLZ 390 500 00) Kto.-Nr. 11 511 194

27.05.2009

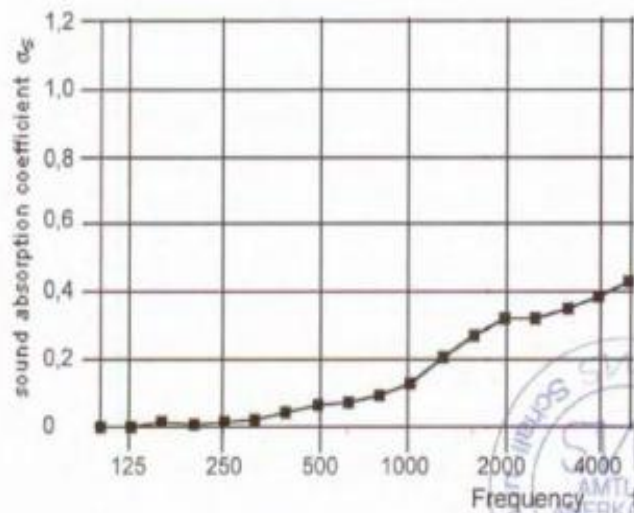
TEST REPORT NO. : CT190509B SA**Sound absorption of DIN EN ISO 354 : 2003 - 12**

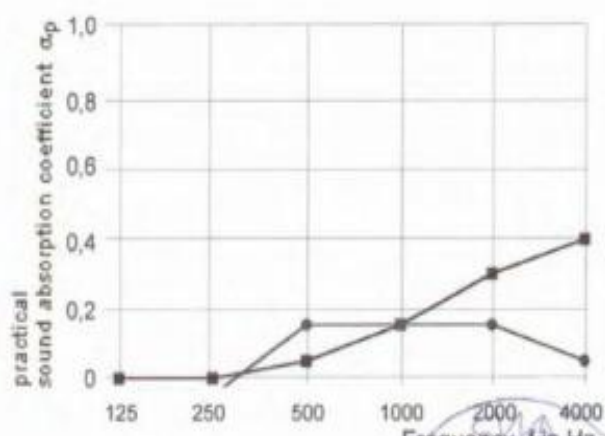
Date of test: 19.05.2009

Customer: CENTEXBEL

Tested material: T905007

laid loose on the floor of the reverberation room

4. Test results		Enclosure SA																												
Sound absorption DIN EN ISO 354 : 2003 - 12 Measurement of sound absorption in a reverberation room Customer: CENTEXBEL		Page 2 of 4																												
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m ² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m ² laid loose on the floor of the reverberation room Dimension of the test area: length: 4,00 m width: 3,00 m																														
Reverberation room: Basic plan: trapezoid <table border="1"> <thead> <tr> <th>f / Hz</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>Volume: 211 m³</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Temperature: 20 °C</td> <td>0,00</td> <td>0,01</td> <td>0,06</td> <td>0,13</td> <td>0,32</td> <td>0,39</td> </tr> <tr> <td>Humidity: 65 %</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> Surface areas of reverberation room: 213 m ² Surface areas of reflectors in reverberation room: 54,5 m ² Reflectors: 6 Alu panels of 1,0 m/ 2,0 m 7 Plywood panels of 1,5 m/ 1,3 m 1 Alu panels of 1,8 m/ 0,9 m			f / Hz	125	250	500	1000	2000	4000	Volume: 211 m ³							Temperature: 20 °C	0,00	0,01	0,06	0,13	0,32	0,39	Humidity: 65 %						
f / Hz	125	250	500	1000	2000	4000																								
Volume: 211 m ³																														
Temperature: 20 °C	0,00	0,01	0,06	0,13	0,32	0,39																								
Humidity: 65 %																														
 Test sound: third-octave noise Reception filter: third-octave																														
Test report no.: CT190509B SA Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH (Dr.-Ing. A. Siebel)																												

4.1 Valuation of test results		Enclosure SA														
Soundabsorber for the application in buildings - valuation of sound absorption Sound absorption of DIN EN ISO 11654 : 1997- 07		Page 3 of 4														
Customer: CENTEXBEL																
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m² laid loose on the floor of the reverberation room																
frequency - range of the "shapeindicators" L M M H H		<table border="1"> <thead> <tr> <th>Frequency in Hz</th> <th>practical sound absorption coefficient</th> </tr> </thead> <tbody> <tr> <td>125</td> <td>0,00</td> </tr> <tr> <td>250</td> <td>0,00</td> </tr> <tr> <td>500</td> <td>0,05</td> </tr> <tr> <td>1000</td> <td>0,15</td> </tr> <tr> <td>2000</td> <td>0,30</td> </tr> <tr> <td>4000</td> <td>0,40</td> </tr> </tbody> </table>	Frequency in Hz	practical sound absorption coefficient	125	0,00	250	0,00	500	0,05	1000	0,15	2000	0,30	4000	0,40
Frequency in Hz	practical sound absorption coefficient															
125	0,00															
250	0,00															
500	0,05															
1000	0,15															
2000	0,30															
4000	0,40															
Results: —●—●— Relation - curve: —●—●—																
Reverberation room: Basic plan: trapezoid Volume: 211 m³ Temperature: 20 °C Humidity: 65 %																
Surfaces areas of reverberation room: 213 m² Surfaces areas of reflectors in reverberation room: 54,5 m²																
																
Evaluated sound absorptions grade α_w $\alpha_w : 0,15 (- - H) ^*)$																
*) It is recommended insistently to use this singular valuation with complete curve of sound absorption garde.																
Test report no.: CT190509B SA Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH (Dr.-Ing. A. Siebel) (Dr.-Ing. L. Siebel)														

4.2 Test results		Enclosure SA																																																									
Reverberation times Measurement of sound absorption in a reverberation room Customer: CENTEXBEL		Page 4 of 4																																																									
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m² laid loose on the floor of the reverberation room Dimension of the test area: length: 4,00 m width: 3,00 m Reverberation times: <table border="1"> <thead> <tr> <th>f / Hz</th> <th>T1 / s</th> <th>T2 / s</th> </tr> </thead> <tbody> <tr><td>100</td><td>9,96</td><td>9,91</td></tr> <tr><td>125</td><td>7,82</td><td>7,79</td></tr> <tr><td>160</td><td>6,73</td><td>6,48</td></tr> <tr><td>200</td><td>7,29</td><td>7,10</td></tr> <tr><td>250</td><td>7,20</td><td>6,98</td></tr> <tr><td>315</td><td>6,22</td><td>5,95</td></tr> <tr><td>400</td><td>6,57</td><td>6,02</td></tr> <tr><td>500</td><td>6,89</td><td>6,00</td></tr> <tr><td>630</td><td>6,93</td><td>5,87</td></tr> <tr><td>800</td><td>6,55</td><td>5,39</td></tr> <tr><td>1000</td><td>6,48</td><td>5,00</td></tr> <tr><td>1250</td><td>6,31</td><td>4,34</td></tr> <tr><td>1600</td><td>5,93</td><td>3,79</td></tr> <tr><td>2000</td><td>5,42</td><td>3,38</td></tr> <tr><td>2500</td><td>4,65</td><td>3,05</td></tr> <tr><td>3150</td><td>3,99</td><td>2,68</td></tr> <tr><td>4000</td><td>3,24</td><td>2,26</td></tr> <tr><td>5000</td><td>2,59</td><td>1,86</td></tr> </tbody> </table>			f / Hz	T1 / s	T2 / s	100	9,96	9,91	125	7,82	7,79	160	6,73	6,48	200	7,29	7,10	250	7,20	6,98	315	6,22	5,95	400	6,57	6,02	500	6,89	6,00	630	6,93	5,87	800	6,55	5,39	1000	6,48	5,00	1250	6,31	4,34	1600	5,93	3,79	2000	5,42	3,38	2500	4,65	3,05	3150	3,99	2,68	4000	3,24	2,26	5000	2,59	1,86
f / Hz	T1 / s	T2 / s																																																									
100	9,96	9,91																																																									
125	7,82	7,79																																																									
160	6,73	6,48																																																									
200	7,29	7,10																																																									
250	7,20	6,98																																																									
315	6,22	5,95																																																									
400	6,57	6,02																																																									
500	6,89	6,00																																																									
630	6,93	5,87																																																									
800	6,55	5,39																																																									
1000	6,48	5,00																																																									
1250	6,31	4,34																																																									
1600	5,93	3,79																																																									
2000	5,42	3,38																																																									
2500	4,65	3,05																																																									
3150	3,99	2,68																																																									
4000	3,24	2,26																																																									
5000	2,59	1,86																																																									
Number of loudspeaker positions: 2 Number of microphone positions: 2 x 6		Test sound: third-octave noise Reception filter: third-octave																																																									
Test report no.: CT190509B SA Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH																																																									



FACULTEIT INGENIEURSWETENSCHAPPEN
Vakgroep TEXTIELKUNDE
Technologiepark 907, B-9052 Gent (Zwijnaarde)
T +32 9 264 57 35 - F +32 9 264 58 46
<http://textiles.UGent.be>
textiles@UGent.be

T.a.v. Hilde Depypere
Centexbel
Technologiepark 7
9052 Zwijnaarde

contact
Didier Van Daele

e-mail
didier.vandaele@UGent.be

date
29/05/2009

TEST REPORT 09-297 B

Samples received :

Order 7489: T905007
Received on 12/05/09

Aim of the test :

determination of applicability with floorheating

Test conditions :

Applicability with floorheating by means of TECOSY : one plate method

Standard: DIN 52 612 part 1 (1979)* in accordance with ISO 8302 (1991)*
Method: A sample is placed between a cold and a warm plate. The cold and the warm plate are kept at the same temperature. The quantity of energy needed to keep the warm and cold plate on temperature, is an indication for the heat transmission of the sample.
Number of tests: 2 samples (3 measurements per sample)
Test conditions: $20 \pm 2^{\circ}\text{C}$ and $65 \pm 4\%$ relative humidity

The tests were ended in week 22/2009

The test results only apply to materials that correspond to the tested sample. Forgery will be legally prosecuted, just like partial reproduction without prior written permission. Tests that are marked *are accredited, those marked * are not accredited. Advices and interpretations are not covered by the accreditation.
The department of Textiles is Notified laboratory n°1611 for the European Products directive 89/106/EC.

p. 1/2
09-297 B



Mr. Upendra R. Oza
STANDARD CARPETS IND LLC
Industrial Area no.1 PO Box 27977
AE- SHARJAH
VERENIGDE ARABISCHE EMIRATEN

your delivery of
2009-05-12

your reference

our reference
PW/5484


date
Zwijnaarde, 2009-06-11

Analysis Report 68886

Required tests :

Determination of the electrical resistance
Assessment of static electrical propensity - walking test
Determination of sound absorption
Determination of impact sound insulation
Determination of thermal resistance by the guarded hot plate apparatus

Identification number	Information given by the client	Date of receipt
T905007	FRS Loop Pile Polypropylene Carpet Tile (Tetris)	2009-05-12


Petra Wittevrongel
order responsible

For further information, please contact our sectorial adviser Jo Wynendaele

This report runs to 6 pages and may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel.
The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples.



VAT BE 0459.218.289
CENTEXBEL-GENT
Technologiepark 7
BE-9052 Zwijnaarde
Tel. + 32 9 220 41 51 • Fax + 32 9 220 49 55
e-mail: gent@centexbel.be

Fin. Acc. 210-0472965-45

IBAN BE44 2100 4729 6545

CENTEXBEL-BRUSSELS
Montoyerstraat 24 B2
BE-1000 Brussels

Tel. + 32 2 287 08 30 • Fax + 32 2 230 68 15

www.centexbel.be

Page 1 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference date page
PW/5484 2009-06-11 2 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of the electrical resistance

1. Method:

Applied standard : ISO 10965 (year: 1998)
Deviations of the standard : -
Testing atmosphere : 23°C and 25 % relative humidity
Applied voltage : 500 Volt
Number of specimens : 3
Number of measurements : 6 (2 measurements per specimen)

2. Results:

Date of ending the test: 25-05-2009

test specimen	surface resistance in Ω	vertical resistance in Ω
1	$1,67 \times 10^{12}$	$9,43 \times 10^{11}$
2	$5,00 \times 10^{12}$	$1,35 \times 10^{12}$
3	$5,00 \times 10^{12}$	$1,28 \times 10^{13}$
4	$3,33 \times 10^{12}$	$6,58 \times 10^{11}$
5	$4,55 \times 10^{12}$	$1,28 \times 10^{12}$
6	$2,50 \times 10^{12}$	$1,25 \times 10^{12}$
geometrical mean value	$3,41 \times 10^{12} \Omega$	$1,61 \times 10^{12} \Omega$

Performed in the physical lab under the responsibility of Petra Wittevrongel.

www.centexbel.be

Page 2 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	3 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Assessment of static electrical propensity - walking test1. Method:

Applied standard : ISO 6356 (year: 2000)
method by walking
Deviations of the standard : dimensions of the carpet 200 cm x 100 cm (assembly of 8
pieces of 50 cm x 50 cm)
Atmosphere for conditioning : 23°C and 25% relative humidity
Conditioning time : at least 7 days
Number of measurements : 3

2. Results:

Date of ending the test: 25-05-2009

measurement	body voltage (kVolts)
	with Neolite sole
1	0.0
2	0.1
3	0.2
average	0.1

Performed under accreditation in the physical lab under the responsibility of Philippe Lemaire.

www.centexbel.be

Page 3 of 13

WWW.Kiliet.com



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	4 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of sound absorption

1. Method:

Performed in the external lab : Schall- und Wärmemeßstelle Aachen GmbH

2. Results:

Date of ending the test : 27-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	5 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of impact sound insulation

1. Method:

Performed in the external lab : Schall- und Wärmemeßstelle Aachen GmbH

2. Results:

Date of ending the test : 27-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.

www.centexbel.be

Page 5 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	6 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of thermal resistance by the guarded hot plate apparatus

1. Method:

Performed in the external lab : Ghent University, Faculty of Engineering (Department of Textiles)

2. Results:

Date of ending the test : 29-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.

www.centexbel.be

Page 6 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

**Schall- und Wärmemeßstelle Aachen GmbH**

Institut für schalltechnische und wärmetechnische Prüfungen - Beratung - Planung

SWA GmbH

Im Grüntal 22 · 52 066 Aachen

Telefon (0241) 572 220

Telefax (0241) 572 256

Geschäftsführung:

Dipl.-Ing. Bernd Gebing

Dr.-Ing. Lothar Siebel

Amtsgericht Aachen · HRB 2708

Labor: Hauptstr. 133 · 52 477 Alsdorf

VMPA Schallschutzprüfstelle DIN 4109

Staatlich anerkannte Sachverständige

für den Schall- u. Wärmeschutz IK-Bau NRW

Bankverbindung: Sparkasse Aachen

(BLZ 390 500 00) Kto.-Nr. 11 011 194

27.05.2009

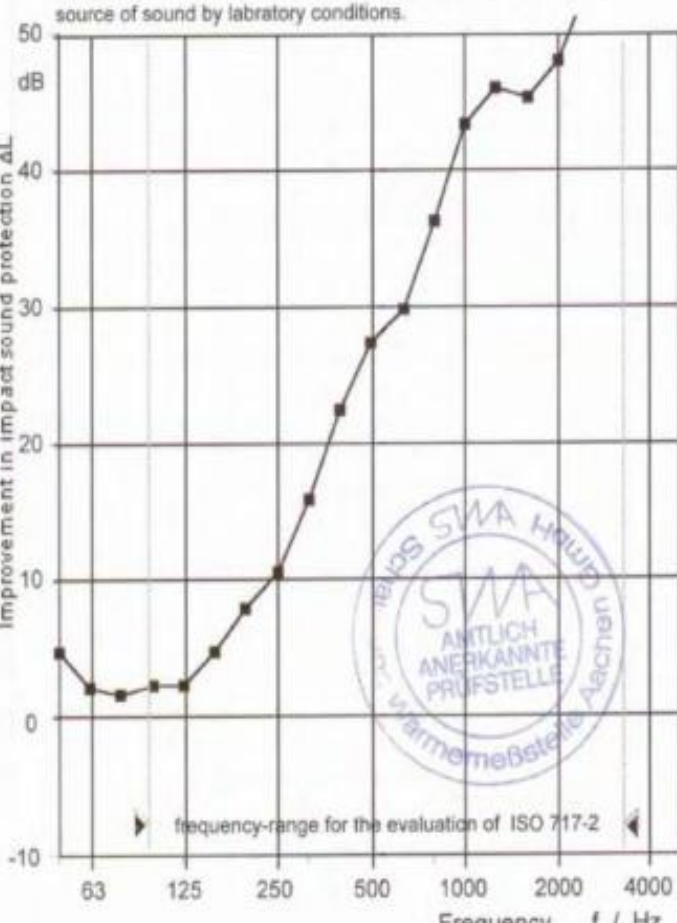
TEST REPORT NO. : CT190509B TS**Impact sound insulation of ISO 140-8 : 1998 - 03**

Date of test: 19.05.2009

Customer: CENTEXBEL

Tested material: T905007

laid loose on a 140 mm thick reinforced concrete floor slab

Test results		Enclosure TS																																																																					
Impact sound insulation of ISO 140-8 : 1998 - 03		Page 2 of 2																																																																					
Measurement of impact sound insulation by a floor covering - on a solid strings-floor																																																																							
Customer: CENTEXBEL																																																																							
Tested material: T905007 Test rooms: 02 u. K2, Hauptstraße 133, 52 477 Alsdorf Test area: 4,24 m x 4,15 m Test area of slab Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m² laid loose on a 140 mm thick reinforced concrete floor slab The results are based on tests, which were effected with on artificial source of sound by laboratory conditions.																																																																							
Receiving room: Volume: 58,9 m³ Temperature: 20 °C Humidity: 65 %																																																																							
<table border="1"> <thead> <tr> <th>Frequency</th> <th>Ln</th> <th>ΔL</th> </tr> <tr> <th>Hz</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr><td>50</td><td></td><td>4,9</td></tr> <tr><td>63</td><td></td><td>2,3</td></tr> <tr><td>80</td><td></td><td>1,8</td></tr> <tr><td>100</td><td>61,0</td><td>2,5</td></tr> <tr><td>125</td><td>61,4</td><td>2,4</td></tr> <tr><td>160</td><td>64,8</td><td>4,9</td></tr> <tr><td>200</td><td>63,7</td><td>8,0</td></tr> <tr><td>250</td><td>65,4</td><td>10,7</td></tr> <tr><td>315</td><td>65,6</td><td>16,0</td></tr> <tr><td>400</td><td>66,1</td><td>22,4</td></tr> <tr><td>500</td><td>66,0</td><td>27,3</td></tr> <tr><td>630</td><td>66,4</td><td>29,8</td></tr> <tr><td>800</td><td>66,3</td><td>36,4</td></tr> <tr><td>1000</td><td>66,2</td><td>43,4</td></tr> <tr><td>1250</td><td>66,6</td><td>46,0</td></tr> <tr><td>1600</td><td>67,2</td><td>45,3</td></tr> <tr><td>2000</td><td>67,1</td><td>47,9</td></tr> <tr><td>2500</td><td>67,0</td><td>53,7</td></tr> <tr><td>3150</td><td>66,4</td><td>54,2</td></tr> <tr><td>4000</td><td></td><td>---</td></tr> <tr><td>5000</td><td></td><td>---</td></tr> </tbody> </table>		Frequency	Ln	ΔL	Hz	dB	dB	50		4,9	63		2,3	80		1,8	100	61,0	2,5	125	61,4	2,4	160	64,8	4,9	200	63,7	8,0	250	65,4	10,7	315	65,6	16,0	400	66,1	22,4	500	66,0	27,3	630	66,4	29,8	800	66,3	36,4	1000	66,2	43,4	1250	66,6	46,0	1600	67,2	45,3	2000	67,1	47,9	2500	67,0	53,7	3150	66,4	54,2	4000		---	5000		---	
Frequency	Ln	ΔL																																																																					
Hz	dB	dB																																																																					
50		4,9																																																																					
63		2,3																																																																					
80		1,8																																																																					
100	61,0	2,5																																																																					
125	61,4	2,4																																																																					
160	64,8	4,9																																																																					
200	63,7	8,0																																																																					
250	65,4	10,7																																																																					
315	65,6	16,0																																																																					
400	66,1	22,4																																																																					
500	66,0	27,3																																																																					
630	66,4	29,8																																																																					
800	66,3	36,4																																																																					
1000	66,2	43,4																																																																					
1250	66,6	46,0																																																																					
1600	67,2	45,3																																																																					
2000	67,1	47,9																																																																					
2500	67,0	53,7																																																																					
3150	66,4	54,2																																																																					
4000		---																																																																					
5000		---																																																																					
Reception filter: third-octave Calculation according ISO 717-2: <table border="1"> <tr> <td>Impact sound improvement index</td> <td>non rated reduction of impact sound insulation</td> <td>$C_{L,A} = -12 \text{ dB}$</td> </tr> <tr> <td>$\Delta L_W = 24 \text{ dB}$</td> <td>$\Delta L_{lin} = \Delta L_W + C_{L,A}$</td> <td>$C_{L,T} = 1 \text{ dB}$</td> </tr> <tr> <td>(VM = 24 dB)</td> <td>$\Delta L_{lin} = 12 \text{ dB}$</td> <td>$C_{L,r,50-2500} = 4 \text{ dB}$</td> </tr> </table>			Impact sound improvement index	non rated reduction of impact sound insulation	$C_{L,A} = -12 \text{ dB}$	$\Delta L_W = 24 \text{ dB}$	$\Delta L_{lin} = \Delta L_W + C_{L,A}$	$C_{L,T} = 1 \text{ dB}$	(VM = 24 dB)	$\Delta L_{lin} = 12 \text{ dB}$	$C_{L,r,50-2500} = 4 \text{ dB}$																																																												
Impact sound improvement index	non rated reduction of impact sound insulation	$C_{L,A} = -12 \text{ dB}$																																																																					
$\Delta L_W = 24 \text{ dB}$	$\Delta L_{lin} = \Delta L_W + C_{L,A}$	$C_{L,T} = 1 \text{ dB}$																																																																					
(VM = 24 dB)	$\Delta L_{lin} = 12 \text{ dB}$	$C_{L,r,50-2500} = 4 \text{ dB}$																																																																					
Test report no.: CT190509B TS Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH (Dipl.-Ing. A. Siebel) (Dipl.-Ing. L. Siebel)																																																																					



Schall- und Wärmemeßstelle Aachen GmbH

Institut für schalltechnische und wärmetechnische Prüfungen - Beratung - Planung

SWA GmbH

Im Grüntal 22 · 52 066 Aachen

Telefon (0241) 970 220

Telefax (0241) 572 856

Geschäftsführung:

Dipl.-Ing. Bernd Gebing

Dr.-Ing. Lothar Siebel

Amtsgericht Aachen · HRB 2706

Labor: Hauptstr. 133 · 52 477 Alsdorf

VMPA Schallschutzprüfstelle DIN 4109
Staatlich anerkannte Sachverständige
für den Schall- u. Wärmeschutz iK-Bau NRW

Bankverbindung: Sparkasse Aachen
(BLZ 390 500 00) Kto.-Nr. 11 011 194

27.05.2009

TEST REPORT NO. : CT190509B SA

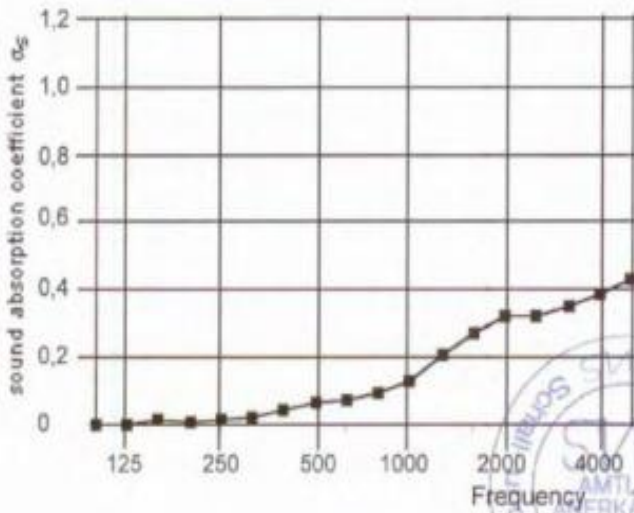
Sound absorption of DIN EN ISO 354 : 2003 - 12

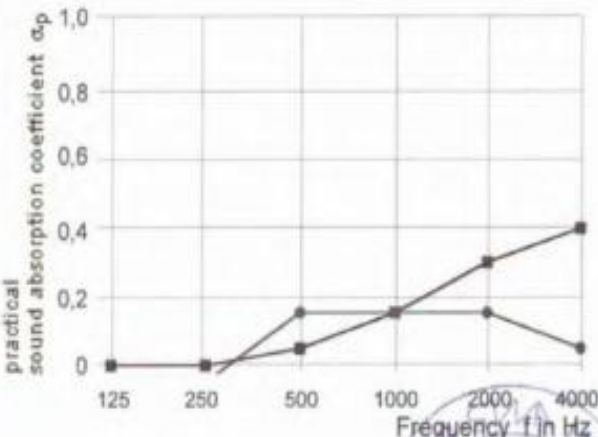
Date of test: 19.05.2009

Customer: CENTEXBEL

Tested material: T905007

laid loose on the floor of the reverberation room

4. Test results		Enclosure SA																												
Sound absorption DIN EN ISO 354 : 2003 - 12 Measurement of sound absorption in a reverberation room Customer: CENTEXBEL		Page 2 of 4																												
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m ² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m ² laid loose on the floor of the reverberation room Dimension of the test area: length: 4,00 m width: 3,00 m																														
Reverberation room: Basic plan: trapezoid <table border="1"> <thead> <tr> <th>f / Hz</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>Volume: 211 m³</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Temperature: 20 °C</td> <td>0,00</td> <td>0,01</td> <td>0,06</td> <td>0,13</td> <td>0,32</td> <td>0,39</td> </tr> <tr> <td>Humidity: 65 %</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> Surface areas of reverberation room: 213 m ² Surface areas of reflectors in reverberation room: 54,5 m ² Reflectors: 6 Alu panels of 1,0 m/ 2,0 m 7 Plywood panels of 1,5 m/ 1,3 m 1 Alu panels of 1,8 m/ 0,9 m			f / Hz	125	250	500	1000	2000	4000	Volume: 211 m ³							Temperature: 20 °C	0,00	0,01	0,06	0,13	0,32	0,39	Humidity: 65 %						
f / Hz	125	250	500	1000	2000	4000																								
Volume: 211 m ³																														
Temperature: 20 °C	0,00	0,01	0,06	0,13	0,32	0,39																								
Humidity: 65 %																														
 Test sound: third-octave noise Reception filter: third-octave																														
Test report no.: CT190509B SA Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH (Dr.-Ing. A. Siebel)																												

4.1 Valuation of test results		Enclosure SA														
Soundabsorber for the application in buildings - valuation of sound absorbtion Sound absorption of DIN EN ISO 11654 : 1997- 07		Page 3 of 4														
Customer: CENTEXBEL																
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m² laid loose on the floor of the reverberation room																
frequency - range of the "shapeindicators" L M M H H		<table border="1"> <thead> <tr> <th>Frequency in Hz</th> <th>practical sound absorption coefficient</th> </tr> </thead> <tbody> <tr> <td>125</td> <td>0,00</td> </tr> <tr> <td>250</td> <td>0,00</td> </tr> <tr> <td>500</td> <td>0,05</td> </tr> <tr> <td>1000</td> <td>0,15</td> </tr> <tr> <td>2000</td> <td>0,30</td> </tr> <tr> <td>4000</td> <td>0,40</td> </tr> </tbody> </table>	Frequency in Hz	practical sound absorption coefficient	125	0,00	250	0,00	500	0,05	1000	0,15	2000	0,30	4000	0,40
Frequency in Hz	practical sound absorption coefficient															
125	0,00															
250	0,00															
500	0,05															
1000	0,15															
2000	0,30															
4000	0,40															
Results:  Relation - curve: 																
Reverberation room: Basic plan: trapezoid Volume: 211 m³ Temperature: 20 °C Humidity: 65 %																
Surfaces areas of reverberation room: 213 m² Surfaces areas of reflectors in reverberation room: 54,5 m²																
																
Evaluated sound absorptions grade α_w $\alpha_w : 0,15 (- - H) ^ *$																
*) It is recommended insisently to use this singular valuation with complete curve of sound absorption garde.																
Test report no.: CT190509B SA Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH  (Dr.-Ing. L. Siebel)														

4.2 Test results		Enclosure SA																																																									
Reverberation times Measurement of sound absorption in a reverberation room Customer: CENTEXBEL		Page 4 of 4																																																									
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m² laid loose on the floor of the reverberation room Dimension of the test area: length: 4,00 m width: 3,00 m Reverberation times: <table border="1"> <thead> <tr> <th>f / Hz</th> <th>T1 / s</th> <th>T2 / s</th> </tr> </thead> <tbody> <tr><td>100</td><td>9,96</td><td>9,91</td></tr> <tr><td>125</td><td>7,82</td><td>7,79</td></tr> <tr><td>160</td><td>6,73</td><td>6,48</td></tr> <tr><td>200</td><td>7,29</td><td>7,10</td></tr> <tr><td>250</td><td>7,20</td><td>6,98</td></tr> <tr><td>315</td><td>6,22</td><td>5,95</td></tr> <tr><td>400</td><td>6,57</td><td>6,02</td></tr> <tr><td>500</td><td>6,89</td><td>6,00</td></tr> <tr><td>630</td><td>6,93</td><td>5,87</td></tr> <tr><td>800</td><td>6,55</td><td>5,39</td></tr> <tr><td>1000</td><td>6,48</td><td>5,00</td></tr> <tr><td>1250</td><td>6,31</td><td>4,34</td></tr> <tr><td>1600</td><td>5,93</td><td>3,79</td></tr> <tr><td>2000</td><td>5,42</td><td>3,38</td></tr> <tr><td>2500</td><td>4,65</td><td>3,05</td></tr> <tr><td>3150</td><td>3,99</td><td>2,68</td></tr> <tr><td>4000</td><td>3,24</td><td>2,26</td></tr> <tr><td>5000</td><td>2,59</td><td>1,86</td></tr> </tbody> </table>			f / Hz	T1 / s	T2 / s	100	9,96	9,91	125	7,82	7,79	160	6,73	6,48	200	7,29	7,10	250	7,20	6,98	315	6,22	5,95	400	6,57	6,02	500	6,89	6,00	630	6,93	5,87	800	6,55	5,39	1000	6,48	5,00	1250	6,31	4,34	1600	5,93	3,79	2000	5,42	3,38	2500	4,65	3,05	3150	3,99	2,68	4000	3,24	2,26	5000	2,59	1,86
f / Hz	T1 / s	T2 / s																																																									
100	9,96	9,91																																																									
125	7,82	7,79																																																									
160	6,73	6,48																																																									
200	7,29	7,10																																																									
250	7,20	6,98																																																									
315	6,22	5,95																																																									
400	6,57	6,02																																																									
500	6,89	6,00																																																									
630	6,93	5,87																																																									
800	6,55	5,39																																																									
1000	6,48	5,00																																																									
1250	6,31	4,34																																																									
1600	5,93	3,79																																																									
2000	5,42	3,38																																																									
2500	4,65	3,05																																																									
3150	3,99	2,68																																																									
4000	3,24	2,26																																																									
5000	2,59	1,86																																																									
Number of loudspeaker positions: 2 Number of microphone positions: 2 x 6		Test sound: third-octave noise Reception filter: third-octave																																																									
Test report no.: CT190509B SA Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH																																																									





FACULTEIT INGENIEURSWETENSCHAPPEN
Vakgroep TEXTIELKUNDE
Technologiepark 907, B-9052 Gent (Zwijnaarde)
T +32 9 264 57 35 - F +32 9 264 58 46
<http://textiles.UGent.be>
textiles@UGent.be

T.a.v. Hilde Depypere
Centexbel
Technologiepark 7
9052 Zwijnaarde

contact
Didier Van Daele

e-mail
didier.vandaele@UGent.be

date
29/05/2009

TEST REPORT 09-297 B

Samples received :

Order 7489: T905007
Received on 12/05/09

Aim of the test :

determination of applicability with floorheating

Test conditions :

Applicability with floorheating by means of TECOSY : one plate method

Standard: DIN 52 612 part 1 (1979)* in accordance with ISO 8302 (1991)*
Method: A sample is placed between a cold and a warm plate. The cold and the warm plate are kept at the same temperature. The quantity of energy needed to keep the warm and cold plate on temperature, is an indication for the heat transmission of the sample.
Number of tests: 2 samples (3 measurements per sample)
Test conditions: $20 \pm 2^{\circ}\text{C}$ and $65 \pm 4\%$ relative humidity

The tests were ended in week 22/2009

The test results only apply to materials that correspond to the tested sample. Forgery will be legally prosecuted, just like partial reproduction without prior written permission. Tests that are marked *are accredited, those marked * are not accredited. Advices and interpretations are not covered by the accreditation.

The department of Textiles is Notified laboratory n°1611 for the European Products directive 89/106/EC.

p. 1/2
09-297 B

intertek
Total Quality. Assured.

Report Number :

DELT20063680



Intertek India Private Limited

290, Udyog Vihar, Phase-II, Gurgaon, Haryana -122016. Tel : 0124-4503400, Fax : 0124-4303592.
Registered Office : E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi -110044. Web site : www.intertek.com.

Page 1 of 13

WWW.Kiliet.com



Total Quality. Assured.

TEST REPORT

ULR - TC-566326120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

APPLICANT : STANDARD CARPETS IND,LLC
Plot No-5315801,, Plot No-5315801, Dubai,
-, United Arabs Emirates
ATTN : Sahil Passi

Sample Description : Ten piece of submitted (2.5 m2) 100% Solution
Dyed Polypropylene Carpet Tile sample.

Applicant Provided Care Instructions :
Vacuum clean


Date Received/date Test Started : 06 Oct 2020
Date Confirmation Received : 06 Oct 2020
Buyer : NOT PROVIDED
Country of Origin : India
P.O.No : -
Fiber Content :
End Uses : Carpet
Style : -
Color : Multi
Manufacturer's Name : Standard Carpets Ind,llc
Article No :

TEST CONDUCTED : AS PER THE REQUEST OF THE APPLICANT. FOR FURTHER DETAILS PLEASE
REFER TO ENCLOSED PAGE(S)

Azo-dyes

TESTED SAMPLE	STANDARD	RESULT
Submitted Sample in color Red+Grey+Green Pile	AZO COLOURANTS AZO COLOURANTS CONTENT REQUIREMENT IN ANNEX XVII ITEM 43 OF THE REACH REGULATION (EC) NO. 1907/2006 & AMENDMENT NO. 552/2009	PASS
Submitted Sample in color Blue+Yellow Pile	AZO COLOURANTS AZO COLOURANTS CONTENT REQUIREMENT IN ANNEX XVII ITEM 43 OF THE REACH REGULATION (EC) NO. 1907/2006 & AMENDMENT NO. 552/2009	PASS
Submitted Sample in color Dark Grey+Grey Pile	AZO COLOURANTS AZO COLOURANTS CONTENT REQUIREMENT IN ANNEX XVII ITEM 43 OF THE REACH REGULATION (EC) NO. 1907/2006 & AMENDMENT NO. 552/2009	PASS

AUTHORIZED BY
POR Intertek India Private Limited [Gurgaon]



SANJAY KUMAR
DY.LAB MANAGER

TEX99

Intertek India Private Limited

Page 1 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana-122016. Tel: 0124-4503400, Fax: 0124-4303592
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi-110044. Web site: www.intertek.com

Page 2 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

intertek
Total Quality Assured

TEST REPORT

ULR - TC-566320120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

CONCLUSION :

Fiber Identification/Composition- 2 Fibre	**
Appearance After Care	**
Dimensions	**
Colour Fastness to Rubbing	**
Color Fastness to Water	**
Colour Fastness to Light Grade 4	**
Tuft Withdrawal	**
Colorfastness to Shampooing	**
Allergenic Dye	**
Delamination	N/A
Cadmium	**
Carcinogenic Dyes	**
Formaldehyde	**
Flammability Test For Carpets & Rugs	M
Flammability	**

NOTE:

M = MEETS REQUIREMENT,	F = FAILS TO MEET REQUIREMENT
* = REQUIREMENT NOT PROVIDED,	NA = NOT APPLICABLE
# = EXEMPTED,	NC = NO COMMENT,
SC = SEE COMMENT	** = REFER RESULT
## = NOT PERFORMED	MA = MARGINAL ACCEPTANCE
NR = NOT REQUESTED	D = DATA ONLY
C = CONFIRM LABEL	

REMARKS :

Test methods are provided by the applicant.

TEX/59

Intertek India Private Limited

Page 2 of 12

200, Udyog Vihar, Phase-II, Gurgaon, Haryana-122015, Tel : 0124-4503400, Fax : 0124-4303592
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi-110044, Website : www.intertek.com

Page 3 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

intertek
Total Quality Assured.

TEST REPORT

ULR - TC-566320120063680P
NUMBER : DELT20063680
DATE : 17-Oct-2020

TEST CONDUCTED (AS REQUESTED BY THE APPLICANT)

1. Fiber Identification/Composition- 2 Fibre
ISO 1833-1:2006

FIBRE COMPOSITION (ON PRODUCT BASIS) :

Pile: 100%
Polypropylene

Requirement

Not Provided

REMARK:

Recommended fibre composition:
Pile: 100% Polypropylene

2. Appearance After Care
vacuum clean

Colour Change

5

OBSERVATION :

Slight colour change was observed.

Requirement

Not Provided

3. Dimensions

ISO 3018 :1974

Length

19.75"

Width

19.75"

Requirement

Not Provided

4. Colour Fastness to Rubbing

ISO 105x12:2016

Dry

4-5

Wet

4-5

Requirement

Not Provided

TEX059

Intertek India Private Limited

Page 3 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana-122015. Tel: 0124-4503400, Fax: 0124-4303502.
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi-110044. Website: www.intertek.com

Page 4 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

intertek
Total Quality Assured.

TEST REPORT

ULR - TC-566320120063680P
NUMBER : DELT20063680
DATE : 17-Oct-2020

5. Color Fastness to Water
ISO 105-E01

Colour Change		4	<u>Requirement</u> Not Provided
COLOUR STAINING	Acetate	4-5	Not Provided
	Cotton	4-5	
	Nylon	4-5	
	Polyester	4-5	
	Acrylic	4-5	
	Wool	4-5	
Self Staining		5	

6. Colour Fastness to Light Grade 4
ISO 105 B02 : 2014

UPTO GRADE 4	Grade	4	<u>Requirement</u> Not Provided
--------------	-------	---	------------------------------------

7. Tuft Withdrawal
ISO 4919:2012

33 N [Withdrawal]	<u>Requirement</u> Not Provided
-------------------	------------------------------------

8. Colorfastness to Shampooing
ISO 18168

Change in Colour	4	<u>Requirement</u> Not Provided
Staining of Cotton	4-5	Not Provided
Staining of Polyester	4-5	
Self Staining	5	

9. Allergenous Dye
- (21)) DIN 54321 (Harmful materials EC 552 HPLC analysis)
Maroon+Grey+Green
Pile

Disperse Orange 149	Not Detected	<u>Requirement</u> Not Provided
Disperse Blue 1	Not Detected	

TEX/59

Intertek India Private Limited

Page 4 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana-122015 Tel : 0124-4503400, Fax : 0124-4303562
Registered Office : E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi-110044 Web site : www.intertek.com

Page 5 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Total Quality Assured

TEST REPORT

ULR - TC-566320120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

Disperse Blue 3	Not Detected
Disperse Blue 7	Not Detected
Disperse Blue 26	Not Detected
Disperse Blue 35	Not Detected
Disperse Blue 102	Not Detected
Disperse Blue 106	Not Detected
Disperse Blue 124	Not Detected
Disperse Orange 1	Not Detected
Disperse Orange 3	Not Detected
Disperse Orange 37/76	Not Detected
Disperse Red 1	Not Detected
Disperse Red 11	Not Detected
Disperse Red 17	Not Detected
Disperse Yellow 1	Not Detected
Disperse Yellow 3	Not Detected
Disperse Yellow 9	Not Detected
Disperse Yellow 39	Not Detected
Disperse Yellow 49	Not Detected
Disperse Brown 1	Not Detected
Disperse Yellow 23	Not Detected
Disperse Orange 37/76/59	Not Detected
Disperse Orange 37	Not Detected
Disperse Orange 76	Not Detected
Disperse Orange 59	Not Detected
Basic Blue 26	Not Detected
Disperse Yellow 14	Not Detected
Basic Red 46	Not Detected
Naphtol As Reactive	Not Detected
Acid Red 14 (Carminique Acid Natural)	Not Detected
Basic Violet 3	Not Detected
Basic Violet 1	Not Detected
Basic Green 4	Not Detected
Disperse Blue 291	Not Detected
Disperse Violet 93	Not Detected
Disperse Yellow 64	Not Detected

Blue+Golden Pile

Disperse Orange 149	Not Detected
Disperse Blue 1	Not Detected
Disperse Blue 3	Not Detected
Disperse Blue 7	Not Detected
Disperse Blue 26	Not Detected
Disperse Blue 35	Not Detected
Disperse Blue 102	Not Detected
Disperse Blue 106	Not Detected
Disperse Blue 124	Not Detected
Disperse Orange 1	Not Detected

Requirement

Not Provided

TEX39

Intertek India Private Limited

Page 5 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana-122015. Tel: 0124-4503400, Fax: 0124-4303592
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi-110044. Web site: www.intertek.com

Page 6 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

intertek
Total Quality Assured.

TEST REPORT

ULR - TC-566320120063680P
NUMBER : DELT20063680
DATE : 17-Oct-2020

Disperse Orange 3	Not Detected
Disperse Orange 37/76	Not Detected
Disperse Red 1	Not Detected
Disperse Red 11	Not Detected
Disperse Red 17	Not Detected
Disperse Yellow 1	Not Detected
Disperse Yellow 3	Not Detected
Disperse Yellow 9	Not Detected
Disperse Yellow 39	Not Detected
Disperse Yellow 49	Not Detected
Disperse Brown 1	Not Detected
Disperse Yellow 23	Not Detected
Disperse Orange 37/76/59	Not Detected
Disperse Orange 37	Not Detected
Disperse Orange 76	Not Detected
Disperse Orange 59	Not Detected
Basic Blue 26	Not Detected
Disperse Yellow 14	Not Detected
Basic Red 46	Not Detected
Naphtol As Reative	Not Detected
Acid Red 14 (Carminique Acid Natural)	Not Detected
Basic Violet 3	Not Detected
Basic Violet 1	Not Detected
Basic Green 4	Not Detected
Disperse Blue 291	Not Detected
Disperse Violet 93	Not Detected
Disperse Yellow 64	Not Detected

Dark Grey+Lt. Grey
Pile

Requirement
Not Provided

Disperse Orange 149	Not Detected
Disperse Blue 1	Not Detected
Disperse Blue 3	Not Detected
Disperse Blue 7	Not Detected
Disperse Blue 26	Not Detected
Disperse Blue 35	Not Detected
Disperse Blue 102	Not Detected
Disperse Blue 106	Not Detected
Disperse Blue 124	Not Detected
Disperse Orange 1	Not Detected
Disperse Orange 3	Not Detected
Disperse Orange 37/76	Not Detected
Disperse Red 1	Not Detected
Disperse Red 11	Not Detected
Disperse Red 17	Not Detected
Disperse Yellow 1	Not Detected
Disperse Yellow 3	Not Detected

TEX039

Intertek India Private Limited

Page 6 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana-122016. Tel: 0124-4503450, Fax: 0124-4303592.
Registered Office: E-20, Block B-1, Mithan Co-Operative Industrial Area, Mathura Road, New Delhi-110044. Website: www.intertek.com

Page 7 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

Intertek
Total Quality Assured

TEST REPORT

ULR - TC-566326120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

Disperse Yellow 9	Not Detected
Disperse Yellow 39	Not Detected
Disperse Yellow 49	Not Detected
Disperse Brown 1	Not Detected
Disperse Yellow 23	Not Detected
Disperse Orange 37/76/59	Not Detected
Disperse Orange 37	Not Detected
Disperse Orange 76	Not Detected
Disperse Orange 59	Not Detected
Basic Blue 26	Not Detected
Disperse Yellow 14	Not Detected
Basic Red 46	Not Detected
Naphtol As Reative	Not Detected
Acid Red 14 (Carminique Acid Natural)	Not Detected
Basic Violet 3	Not Detected
Basic Violet 1	Not Detected
Basic Green 4	Not Detected
Disperse Blue 291	Not Detected
Disperse Violet 93	Not Detected
Disperse Yellow 64	Not Detected

REMARK:

DETECTION LIMIT = 15 mg/kg

10. Cadmium

EN 1122.

Black Rubber Back Side

Not Detected

Requirement
Not Provided

REMARK:

Minimum Detection Limit = 10 Parts Per Million

TEX59

Intertek India Private Limited

Page 7 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana - 122016. Tel: 0124-4503400. Fax: 0124-4303592.
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi - 110044. Web site: www.intertek.com

Page 8 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

11. Carcinogenic Dyes

- (9) DIN 54321 (Harmful materials EC 552 HPLC analysis)
Maroon+Grey+Green
Pile

		<u>Requirement</u>
Disperse Blue 1	Not Detected	Not Provided
Basic Red 9	Not Detected	
Acid Red 26	Not Detected	
Disperse Yellow 3	Not Detected	
Direct Blue 6	Not Detected	
Direct Black 38	Not Detected	
Disperse Orange 11	Not Detected	
Basic Violet 14	Not Detected	
Direct Red 28	Not Detected	

Blue+Golden Pile

		<u>Requirement</u>
Disperse Blue 1	Not Detected	Not Provided
Basic Red 9	Not Detected	
Acid Red 26	Not Detected	
Disperse Yellow 3	Not Detected	
Direct Blue 6	Not Detected	
Direct Black 38	Not Detected	
Disperse Orange 11	Not Detected	
Basic Violet 14	Not Detected	
Direct Red 28	Not Detected	

Dark Grey+Lt. Grey
Pile

		<u>Requirement</u>
Disperse Blue 1	Not Detected	Not Provided
Basic Red 9	Not Detected	
Acid Red 26	Not Detected	
Disperse Yellow 3	Not Detected	
Direct Blue 6	Not Detected	
Direct Black 38	Not Detected	
Disperse Orange 11	Not Detected	
Basic Violet 14	Not Detected	
Direct Red 28	Not Detected	

REMARK:

DETECTION LIMIT = 15 mg/kg

12. Formaldehyde

BS EN ISO 14184 PART-1 :2011 :

Not Detected

Requirement
Not Provided

REMARK:

Detection limit -5 ppm

13. Azo-dyes

EN ISO 14362-1:2012 As Per European Test Procedure For Detection of the Use of Certain Azo Colorants By Using Gas Chromatographic-mass Spectrometric (Gc-ms) and High Performance Liquid Chromatographic (Hplc) Analysis.

Red+Grey+Green Pile

Result In mg/kg	CAS-NO	RESULTS	Requirement
4-Aminobiphenyl	92-67-1	N	10 ppm
Benzidine	92-87-5	N	
4-Chloro-O-Toluidine	95-69-2	N	
2-Naphthylamine	91-59-8	N	
O-Aminoazotoluene	97-56-3	N	
5-Nitro- O - Toluidine	99-55-8	N	
P-Chloroaniline	106-47-8	N	
2,4-Diaminoanisole	615-05-4	N	
4,4'-Diaminodiphenylmethane	101-77-9	N	
3,3'-Dichlorobenzidine	91-94-1	N	
3,3'-Dimethoxybenzidine	119-90-4	N	
3,3'-Dimethylbenzidine	119-93-7	N	
3,3'-Dimethyl-4,4' Diaminobiphenylmethane	838-88-0	N	
P-Kresidin	120-71-8	N	
4,4'-Methylene-Bis-(2 Chloroaniline)	101-14-4	N	
4,4'-Oxydianiline	101-80-4	N	
4,4'-Thiodianiline	139-65-1	N	
O-Toluidine	95-53-4	N	
2,4-Toluediamine	95-80-7	N	
2,4,5-Trimethylaniline	137-17-7	N	
2-Methoxyaniline	90-04-0	N	
P-Aminoazobenzene	60-09-3	N	
2,6 XYLIDINE	87-62-7	N	
2,4 XYLIDINE	95-68-1	N	

REMARK:

Summary : Presence Of Carcinogenic Amines N

Results : Not Detected

Remark : Detection Limit 5 Parts Per Million

PPM : Parts Per Million

N : Not Detected

intertek
Total Quality Assurance

TEST REPORT

ULR - TC-566320120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

Blue+Yellow Pile

Result In mg/kg	CAS-NO	RESULTS	Requirement
4-Aminobiphenyl	92-67-1	N	30 ppm
Benzidine	92-87-5	N	
4-Chloro-O-Toluidine	95-69-2	N	
2-Naphthylamine	91-59-8	N	
O-Aminoazotoluene	97-56-3	N	
5-Nitro- O - Toluidine	99-55-8	N	
P-Chloroaniline	106-47-8	N	
2,4-Diaminoanisole	615-05-4	N	
4,4'-Diaminodiphenylmethane	101-77-9	N	
3,3'-Dichlorobenzidine	91-94-1	N	
3,3'-Dimethoxybenzidine	119-90-4	N	
3,3'-Dimethylbenzidine	119-93-7	N	
3,3'-Dimethyl-4,4' Diaminobiphenylmethane	838-88-0	N	
P-Kresidin	120-71-8	N	
4,4'-Methylene-Bis-(2 Chloroaniline)	101-14-4	N	
4,4'-Oxydianiline	101-80-4	N	
4,4'-Thiodianiline	139-65-1	N	
O-Toluidine	95-53-4	N	
2,4-Toluenediamine	95-80-7	N	
2,4,5-Trimethylaniline	137-17-7	N	
2-Methoxyaniline	90-04-0	N	
P-Aminoazobenzene	60-09-3	N	
2,6 XYLIDINE	87-62-7	N	
2,4 XYLIDINE	95-68-1	N	

REMARK:

Summary : Presence Of Carcinogenic Amines N

Results : Not Detected

Remark : Detection Limit 5 Parts Per Million

PPM : Parts Per Million

N : Not Detected

TEX/59

Intertek India Private Limited

Page 10 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana -122015. Tel: 0124-4503400, Fax: 0124-4303592.
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi -110044. Website: www.intertek.com

Page 11 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

intertek

Total Quality Assured.

TEST REPORT

ULR - TC-566320120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

Dark Grey+Grey Pile

Result In mg/kg	CAS-NO	RESULTS	Requirement
4-Aminobiphenyl	92-67-1	N	30 ppm
Benzidine	92-87-5	N	
4-Chloro-O-Toluidine	95-69-2	N	
2-Naphthylamine	91-59-8	N	
O-Aminoazotoluene	97-56-3	N	
5-Nitro- O - Toluidine	99-55-8	N	
P-Chloroaniline	106-47-8	N	
2,4-Diaminoanisole	615-05-4	N	
4,4'-Diaminodiphenylmethane	101-77-9	N	
3,3'-Dichlorobenzidine	91-94-1	N	
3,3'-Dimethoxybenzidine	119-90-4	N	
3,3'-Dimethylbenzidine	119-93-7	N	
3,3'-Dimethyl-4,4' Diaminobiphenylmethane	838-88-0	N	
P-Kresidin	120-71-8	N	
4,4'-Methylene-Bis-(2 Chloroaniline)	101-14-4	N	
4,4'-Oxydianiline	101-80-4	N	
4,4'-Thiodianiline	139-65-1	N	
O-Toluidine	95-53-4	N	
2,4-Toluenediamine	95-80-7	N	
2,4,5-Trimethylaniline	137-17-7	N	
2-Methoxyaniline	90-04-0	N	
P-Aminoazobenzene	60-09-3	N	
2,6 XYLIDINE	87-62-7	N	
2,4 XYLIDINE	95-68-1	N	

REMARK:

Summary : Presence Of Carcinogenic Amines N

Results : Not Detected

Remark : Detection Limit 5 Parts Per Million

PPM : Parts Per Million

N : Not Detected

14. Flammability Test For Carpets & Rugs

16 CFR 1631

		Requirement
Test Method	16 CFR 1631 (FP2-70)	
Sample Dimension	9X9 INCH	
Type of Igniting Source	METHANAMINE	
% Relative Humidity	65%	
Conditioning Time Prior to Test	1 HRS	
Number of Specimens Meet the Test Criterion	8	Must meet

ORIGINAL

1]	3.0
2]	2.8
3]	2.8
4]	3.3
5]	3.0
6]	3.1
7]	2.9
8]	3.0

TEX59

Intertek India Private Limited

Page 11 of 12

200, Udyog Vihar, Phase-II, Gurgaon, Haryana -122016. Tel.: 0124-4803400, Fax: 0124-4303992
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi -110044. Web site: www.intertek.com

Page 12 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

15. Flammability

Test Method	ISO 6925: 1982
Sample Dimension	230X230 ±3 MM
Diameter of Flattening Frame	230 MM X 230X6.5 ±0.5 MM WITH HOLE IN CENTER OF DIAMETER 205 MM
Type of Ignition Source	METHANAMINE TABLET

CONDITIONING:

Prior to testing: At least 24 hours at 20±2°C and 65±2% relative humidity.

At the time of testing: Temperature between 10°C and 30°C, relative humidity between 20% and 65% .

OR

Prior to testing: 2 hours at 105±2°C followed by a minimum of 1 hour over desiccator.

At the time of testing: Temperature between 10°C and 30°C, relative humidity between 20% and 65% .

THE NEAREST DISTANCE FROM BURNT AREA TO THE FRAME EDGE (IN MM)

Specimen Number	Maximum distance from the center of the sample to the edge of the charred area (MM)	Flaming ceased (Sec)	Time effect of Ignition reached the flattening frame (Sec)
1	30	64	-
2	26	78	-
3	29	73	-
4	28	76	-
5	33	80	-
6	30	72	-
7	24	64	-
8	31	70	-

NA= Not Applicable

DNI=Did not Ignite

FE=Forcibly extinguished after charred area reached the flattening ring

END OF THE TEST REPORT

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Addressee in respect of this report and only accepts liability to the Addressee insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute.
<http://www.intertek.com/terms>

TEX19

Intertek India Private Limited

Page 12 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana -122015, Tel: 0124-4501400, Fax: 0124-4303592
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi -110044. Web site: www.intertek.com

Page 13 of 13

WWW.Kiliet.com

intertek
Total Quality. Assured.

Report Number :

DELT20063680



Intertek India Private Limited

290, Udyog Vihar, Phase-II, Gurgaon, Haryana -122016. Tel : 0124-4503400, Fax : 0124-4303592.
Registered Office : E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi -110044. Web site : www.intertek.com.

Page 1 of 13

WWW.Kiliet.com

Kiliet
Standard Carpets

15. Flammability

Test Method	ISO 6925: 1982
Sample Dimension	230X230 ±3 MM
Diameter of Flattening Frame	230 MM X 230X6.5 ±0.5 MM WITH HOLE IN CENTER OF DIAMETER 205 MM
Type of Ignition Source	METHANAMINE TABLET

CONDITIONING:

Prior to testing: At least 24 hours at 20±2°C and 65±2% relative humidity.

At the time of testing: Temperature between 10°C and 30°C, relative humidity between 20% and 65% .

OR

Prior to testing: 2 hours at 105±2°C followed by a minimum of 1 hour over desiccator.

At the time of testing: Temperature between 10°C and 30°C, relative humidity between 20% and 65% .

THE NEAREST DISTANCE FROM BURNT AREA TO THE FRAME EDGE (IN MM)

Specimen Number	Maximum distance from the center of the sample to the edge of the charred area (MM)	Flaming ceased (Sec)	Time effect of Ignition reached the flattening frame (Sec)
1	30	64	-
2	26	78	-
3	29	73	-
4	28	76	-
5	33	80	-
6	30	72	-
7	24	64	-
8	31	70	-

NA= Not Applicable

DNI=Did not ignite

FE=Forcibly extinguished after charred area reached the flattening ring

END OF THE TEST REPORT

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Addressee in respect of this report and only accepts liability to the Addressee insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute. <http://www.intertek.com/terms>

TEX19

Intertek India Private Limited

Page 12 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana -122016, Tel: 0124-4501400, Fax: 0124-4303592
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi -110044. Web site: www.intertek.com



Total Quality Assured.

TEST REPORT

ULR - TC-566320120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

CONCLUSION :

Fiber Identification/Composition- 2 Fibre	**
Appearance After Care	**
Dimensions	**
Colour Fastness to Rubbing	**
Color Fastness to Water	**
Colour Fastness to Light Grade 4	**
Tuft Withdrawal	**
Colorfastness to Shampooing	**
Allergenic Dye	**
Delamination	N/A
Cadmium	**
Carcinogenic Dyes	**
Formaldehyde	**
Flammability Test For Carpets & Rugs	M
Flammability	**

NOTE:

M = MEETS REQUIREMENT,	F = FAILS TO MEET REQUIREMENT
* = REQUIREMENT NOT PROVIDED,	NA = NOT APPLICABLE
# = EXEMPTED,	NC = NO COMMENT,
SC = SEE COMMENT	** = REPER RESULT
## = NOT PERFORMED	MA = MARGINAL ACCEPTANCE
NR = NOT REQUESTED	D = DATA ONLY
C = CONFIRM LABEL	

REMARKS :

Test methods are provided by the applicant.

TEX099

Intertek India Private Limited

Page 2 of 12

295, Udyog Vihar, Phase-II, Gurgaon, Haryana-122016. Tel: 0124-4503400, Fax: 0124-4503592.
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi-110044. Web site: www.intertek.com

Page 3 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

Intertek
Total Quality Assured**TEST REPORT**

ULR - TC-566320120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

TEST CONDUCTED (AS REQUESTED BY THE APPLICANT)

1. Fiber Identification/Composition- 2 Fibre
ISO 1833-1:2006

FIBRE COMPOSITION (ON PRODUCT BASIS) :

:

Pile: 100%
PolypropyleneRequirement

Not Provided

REMARK:Recommended fibre composition:
Pile: 100% Polypropylene**2. Appearance After Care**
vacuum clean

Colour Change

5

OBSERVATION :

. Slight colour change was observed.

Requirement

Not Provided

3. Dimensions

ISO 3018 :1974

Length

19.75"

Width

19.75"

Requirement

Not Provided

4. Colour Fastness to Rubbing

ISO 105X12:2016

Dry

4-5

Wet

4-5

Requirement

Not Provided

TEX29

Intertek India Private Limited

Page 3 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana-122016. Tel: 0124-4503400, Fax: 0124-4303592
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi-110044. Web site: www.intertek.com

Page 4 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Total Quality Assured

TEST REPORT

ULR - TC-566310120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

5. Color Fastness to Water

ISO 105-E01

Colour Change

4

Requirement

Not Provided

COLOUR STAINING

Acetate

4-5

Not Provided

Cotton

4-5

Nylon

4-5

Polyester

4-5

Acrylic

4-5

Wool

4-5

Self Staining

5

6. Colour Fastness to Light Grade 4

ISO 105 B02 : 2014

UPTO GRADE 4

Grade

4

Requirement

Not Provided

7. Tuft Withdrawal

ISO 4919:2012

33 N [Withdrawal]

Requirement

Not Provided

8. Colorfastness to Shampooing

ISO 18168

Change in Colour

4

Requirement

Not Provided

Staining of Cotton

4-5

Not Provided

Staining of Polyester

4-5

Self Staining

5

9. Allergenous Dye

- (21)) DIN 54321 (Harmful materials EC 552 HPLC analysis)

Maroon+Grey+Green

Pile

Disperse Orange 149

Not Detected

Requirement

Not Provided

Disperse Blue 1

Not Detected

TEX09

Intertek India Private Limited

Page 4 of 12

290, Udyog Vihar, Phase-4, Gurgaon, Haryana-122016. Tel: 0124-4503400, Fax: 0124-4303592

Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi-110044. Web site: www.intertek.com

Page 5 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

Disperse Blue 3	Not Detected
Disperse Blue 7	Not Detected
Disperse Blue 26	Not Detected
Disperse Blue 35	Not Detected
Disperse Blue 102	Not Detected
Disperse Blue 106	Not Detected
Disperse Blue 124	Not Detected
Disperse Orange 1	Not Detected
Disperse Orange 3	Not Detected
Disperse Orange 37/76	Not Detected
Disperse Red 1	Not Detected
Disperse Red 11	Not Detected
Disperse Red 17	Not Detected
Disperse Yellow 1	Not Detected
Disperse Yellow 3	Not Detected
Disperse Yellow 9	Not Detected
Disperse Yellow 39	Not Detected
Disperse Yellow 49	Not Detected
Disperse Brown 1	Not Detected
Disperse Yellow 23	Not Detected
Disperse Orange 37/76/59	Not Detected
Disperse Orange 37	Not Detected
Disperse Orange 76	Not Detected
Disperse Orange 59	Not Detected
Basic Blue 26	Not Detected
Disperse Yellow 14	Not Detected
Basic Red 46	Not Detected
Naphtol As Reactive	Not Detected
Acid Red 14 (Carminique Acid Natural)	Not Detected
Basic Violet 3	Not Detected
Basic Violet 1	Not Detected
Basic Green 4	Not Detected
Disperse Blue 291	Not Detected
Disperse Violet 93	Not Detected
Disperse Yellow 64	Not Detected

Blue+Golden Pile

Disperse Orange 149	Not Detected
Disperse Blue 1	Not Detected
Disperse Blue 3	Not Detected
Disperse Blue 7	Not Detected
Disperse Blue 26	Not Detected
Disperse Blue 35	Not Detected
Disperse Blue 102	Not Detected
Disperse Blue 106	Not Detected
Disperse Blue 124	Not Detected
Disperse Orange 1	Not Detected

Requirement

Not Provided



Total Quality. Assured.

TEST REPORT

ULR - TC-566320120043680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

Disperse Orange 2	Not Detected
Disperse Orange 37/76	Not Detected
Disperse Red 1	Not Detected
Disperse Red 11	Not Detected
Disperse Red 17	Not Detected
Disperse Yellow 1	Not Detected
Disperse Yellow 3	Not Detected
Disperse Yellow 9	Not Detected
Disperse Yellow 39	Not Detected
Disperse Yellow 49	Not Detected
Disperse Brown 1	Not Detected
Disperse Yellow 23	Not Detected
Disperse Orange 37/76/59	Not Detected
Disperse Orange 27	Not Detected
Disperse Orange 76	Not Detected
Disperse Orange 59	Not Detected
Basic Blue 26	Not Detected
Disperse Yellow 14	Not Detected
Basic Red 46	Not Detected
Naphtol As Reactive	Not Detected
Acid Red 14 (Carminique Acid Natural)	Not Detected
Basic Violet 3	Not Detected
Basic Violet 1	Not Detected
Basic Green 4	Not Detected
Disperse Blue 291	Not Detected
Disperse Violet 93	Not Detected
Disperse Yellow 64	Not Detected

Dark Grey+Lt. Grey
Pile

Requirement

Not Provided

Disperse Orange 149	Not Detected
Disperse Blue 1	Not Detected
Disperse Blue 3	Not Detected
Disperse Blue 7	Not Detected
Disperse Blue 26	Not Detected
Disperse Blue 35	Not Detected
Disperse Blue 102	Not Detected
Disperse Blue 106	Not Detected
Disperse Blue 124	Not Detected
Disperse Orange 1	Not Detected
Disperse Orange 3	Not Detected
Disperse Orange 37/76	Not Detected
Disperse Red 1	Not Detected
Disperse Red 11	Not Detected
Disperse Red 17	Not Detected
Disperse Yellow 1	Not Detected
Disperse Yellow 3	Not Detected

TEX09

Intertek India Private Limited

Page 6 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana -122016. Tel: 0124-4503400, Fax: 0124-4303592
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi -110044. Website: www.intertek.com

Page 7 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

Intertek
Total Quality Assured.

TEST REPORT

ULR - TC-566320120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

Disperse Yellow 9	Not Detected
Disperse Yellow 39	Not Detected
Disperse Yellow 49	Not Detected
Disperse Brown 1	Not Detected
Disperse Yellow 23	Not Detected
Disperse Orange 37/76/59	Not Detected
Disperse Orange 37	Not Detected
Disperse Orange 76	Not Detected
Disperse Orange 59	Not Detected
Basic Blue 26	Not Detected
Disperse Yellow 14	Not Detected
Basic Red 46	Not Detected
Naphtol As Reative	Not Detected
Acid Red 14 (Carminique Acid Natural)	Not Detected
Basic Violet 3	Not Detected
Basic Violet 1	Not Detected
Basic Green 4	Not Detected
Disperse Blue 291	Not Detected
Disperse Violet 93	Not Detected
Disperse Yellow 64	Not Detected

REMARK:

DETECTION LIMIT = 15 mg/kg

10. Cadmium

EN 1122.

Black Rubber Back Side

Not Detected

Requirement
Not Provided

REMARK:

Minimum Detection Limit = 10 Parts Per Million

TEX39

Intertek India Private Limited

Page 7 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana - 122016. Tel: 0124-4503400, Fax: 0124-4303502
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi - 110044. Website: www.intertek.com

Page 8 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Total Quality Assured.

TEST REPORT

ULR - TC-566320120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

11. Carcinogenic Dyes

- (9) DIN 54321 (Harmful materials EC 552 HPLC analysis)
Maroon+Grey+Green
Pile

Disperse Blue 1	Not Detected
Basic Red 9	Not Detected
Acid Red 26	Not Detected
Disperse Yellow 3	Not Detected
Direct Blue 6	Not Detected
Direct Black 38	Not Detected
Disperse Orange 11	Not Detected
Basic Violet 14	Not Detected
Direct Red 28	Not Detected

Requirement

Not Provided

Blue+Golden Pile

Disperse Blue 1	Not Detected
Basic Red 9	Not Detected
Acid Red 26	Not Detected
Disperse Yellow 3	Not Detected
Direct Blue 6	Not Detected
Direct Black 38	Not Detected
Disperse Orange 11	Not Detected
Basic Violet 14	Not Detected
Direct Red 28	Not Detected

Requirement

Not Provided

Dark Grey+Lt. Grey
Pile

Disperse Blue 1	Not Detected
Basic Red 9	Not Detected
Acid Red 26	Not Detected
Disperse Yellow 3	Not Detected
Direct Blue 6	Not Detected
Direct Black 38	Not Detected
Disperse Orange 11	Not Detected
Basic Violet 14	Not Detected
Direct Red 28	Not Detected

Requirement

Not Provided

REMARK:

DETECTION LIMIT = 15 mg/kg

TEX59

Intertek India Private Limited

Page 8 of 12

29C, Udyog Vihar, Phase-II, Gurgaon, Haryana-122016. Tel: 0124-4503430. Fax: 0124-4303592.
Registered Office: E-30, Block E-1, Mehra Co-Operative Industrial Area, Mathura Road, New Delhi-110044. Website: www.intertek.com

Page 9 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

intertek

Total Quality Assured.

TEST REPORT

ULR - TC-566320120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

12. Formaldehyde

BS EN ISO 14184 PART-1 :2011 :

Not Detected

Requirement

Not Provided

REMARK:

Detection limit -5 ppm

13. Azo-dyes

EN ISO 14362-1:2012 As Per European Test Procedure For Detection of the Use of Certain Azo Colorants By Using Gas Chromatographic-mass Spectrometric (Gc-ms) and High Performance Liquid Chromatographic (Hplc) Analysis.

Red+Grey+Green Pile

Result In mg/kg	CAS-NO	RESULTS	Requirement
4-Aminobiphenyl	92-67-1	N	30 ppm
Benzidine	92-87-5	N	
4-Chloro-O-Toluidine	95-69-2	N	
2-Naphthylamine	91-59-8	N	
O-Aminoazotoluene	97-56-3	N	
5-Nitro- O - Toluidine	99-55-8	N	
P-Chloroaniline	106-47-8	N	
2,4-Diaminoanisole	615-05-4	N	
4,4'-Diaminodiphenylmethane	101-77-9	N	
3,3'-Dichlorobenzidine	91-94-1	N	
3,3'-Dimethoxybenzidine	119-90-4	N	
3,3'-Dimethylbenzidine	119-93-7	N	
3,3'-Dimethyl-4,4' Diaminobiphenylmethane	838-88-0	N	
P-Kresidin	120-71-8	N	
4,4'-Methylene-Bis-(2 Chloroaniline)	101-14-4	N	
4,4'-Oxydianiline	101-80-4	N	
4,4'-Thiodianiline	139-65-1	N	
O-Toluidine	95-53-4	N	
2,4-Toluenediamine	95-80-7	N	
2,4,5-Trimethylaniline	137-17-7	N	
2-Methoxyaniline	90-04-0	N	
P-Aminoazobenzene	60-09-3	N	
2,6 XYLIDINE	87-62-7	N	
2,4 XYLIDINE	95-68-1	N	

REMARK:

Summary : Presence Of Carcinogenic Amines N

Results : Not Detected

Remark : Detection Limit 5 Parts Per Million

PPM : Parts Per Million

N : Not Detected

TEX99

Intertek India Private Limited

Page 9 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana-122016. Tel : 0124-4503400, Fax : 0124-4303592
Registered Office : E-26, Block B-1, Moham Co-Operative Industrial Area, Mathura Road, New Delhi-110044. Web site : www.intertek.com

Page 10 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

intertek
Total Quality Assured

TEST REPORT

ULR - TC-566310120063680P

NUMBER : DELT20063680

DATE : 17-Oct-2020

Blue+Yellow Pile

Result In mg/kg	CAS-NO	RESULTS	Requirement
4-Aminobiphenyl	92-67-1	N	30 ppm
Benzidine	92-87-5	N	
4-Chloro-O-Toluidine	95-69-2	N	
2-Naphthylamine	91-59-8	N	
O-Aminoazotoluene	97-56-3	N	
5-Nitro- O - Toluidine	99-55-8	N	
P-Chloroaniline	106-47-8	N	
2,4-Diaminoanisole	615-05-4	N	
4,4'-Diaminodiphenylmethane	101-77-9	N	
3,3'-Dichlorobenzidine	91-94-1	N	
3,3'-Dimethoxybenzidine	119-90-4	N	
3,3'-Dimethylbenzidine	119-93-7	N	
3,3'-Dimethyl-4,4' Diaminobiphenylmethane	838-88-0	N	
P-Kresidin	120-71-8	N	
4,4'-Methylene-Bis-(2 Chloroaniline)	101-14-4	N	
4,4'-Oxydianiline	101-80-4	N	
4,4'-Thiodianiline	139-65-1	N	
O-Toluidine	95-53-4	N	
2,4-Toluenediamine	95-80-7	N	
2,4,5-Trimethylaniline	137-17-7	N	
2-Methoxyaniline	90-04-0	N	
P-Aminoazobenzene	60-09-3	N	
2,6 XYLIDINE	87-62-7	N	
2,4 XYLIDINE	95-68-1	N	

REMARK:

Summary : Presence Of Carcinogenic Amines N

Results : Not Detected

Remark : Detection Limit 5 Parts Per Million

PPM : Parts Per Million

N : Not Detected

TEX79

Intertek India Private Limited

Page 10 of 12

290, Udyog Vihar, Phase-II, Gurgaon, Haryana-122016. Tel: 0124-4503400. Fax: 0124-4303592.
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi-110044. Website: www.intertek.com

Page 11 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

Dark Grey+Grey Pile

Result In mg/kg	CAS-NO	RESULTS	Requirement
4-Aminobiphenyl	92-67-1	N	30 ppm
Benzidine	92-87-5	N	
4-Chloro-O-Toluidine	95-69-2	N	
2-Naphthylamine	91-59-8	N	
O-Aminoazotoluene	97-56-3	N	
5-Nitro- O - Toluidine	99-55-8	N	
P-Chloroaniline	106-47-8	N	
2,4-Diaminoanisole	615-05-4	N	
4,4'-Diaminodiphenylmethane	101-77-9	N	
3,3'-Dichlorobenzidine	91-94-1	N	
3,3'-Dimethoxybenzidine	119-90-4	N	
3,3'-Dimethylbenzidine	119-93-7	N	
3,3'-Dimethyl-4,4' Diaminobiphenylmethane	838-88-0	N	
P-Kresidin	120-71-8	N	
4,4'-Methylene-Bis-(2 Chloroaniline)	101-14-4	N	
4,4'-Oxydianiline	101-80-4	N	
4,4'-Thiodianiline	139-65-1	N	
O-Toluidine	95-53-4	N	
2,4-Toluenediamine	95-80-7	N	
2,4,5-Trimethylaniline	137-17-7	N	
2-Methoxyaniline	90-04-0	N	
P-Aminoazobenzene	60-09-3	N	
2,6 XYLIDINE	87-62-7	N	
2,4 XYLIDINE	95-68-1	N	

REMARK:

Summary : Presence Of Carcinogenic Amines N

Results : Not Detected

Remark : Detection Limit 5 Parts Per Million

PPM : Parts Per Million

N : Not Detected

14. Flammability Test For Carpets & Rugs

16 CFR 1631

	16 CFR 1631 (FF2-70)	Requirement
Test Method	9X9 INCH	
Sample Dimension	METHANAMINE	
Type of Igniting Source	65%	
% Relative Humidity	1 HRS	
Conditioning Time Prior to Test	8	Must meet
Number of Specimens Meet the Test		
Criterion		

ORIGINAL

1]	3.0
2]	2.8
3]	2.8
4]	3.3
5]	3.0
6]	3.1
7]	2.9
8]	3.0

15. Flammability

Test Method	ISO 6925: 1982
Sample Dimension	230X230 ±3 MM
Diameter of Flattening Frame	230 MM X 230X6.5 ±0.5 MM WITH HOLE IN CENTER OF DIAMETER 205 MM
Type of Ignition Source	METHANAMINE TABLET

CONDITIONING:

Prior to testing: At least 24 hours at 20±2°C and 65±2% relative humidity.

At the time of testing: Temperature between 10°C and 30°C, relative humidity between 20% and 65% .

OR

Prior to testing: 2 hours at 105±2°C followed by a minimum of 1 hour over desiccator.

At the time of testing: Temperature between 10°C and 30°C, relative humidity between 20% and 65% .

THE NEAREST DISTANCE FROM BURNT AREA TO THE FRAME EDGE (IN MM)

Specimen Number	Maximum distance from the center of the sample to the edge of the charred area (MM)	Flaming ceased (Sec)	Time effect of Ignition reached the flattening frame (Sec)
1	30	64	-
2	26	78	-
3	29	73	-
4	28	76	-
5	33	80	-
6	30	72	-
7	24	64	-
8	31	70	-

NA= Not Applicable

DNI=Did not Ignite

FE=Forcibly extinguished after charred area reached the flattening ring

END OF THE TEST REPORT

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Addressee in respect of this report and only accepts liability to the Addressee insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute.

<http://www.intertek.com/terms>

TEX/59

Intertek India Private Limited

Page 12 of 12

290, Udayog Vihar, Phase-II, Gurgaon, Haryana -122016. Tel: 0124-4503400, Fax: 0124-4303592
Registered Office: E-20, Block B-1, Mohan Co-Operative Industrial Area, Mathura Road, New Delhi -110044. Web site: www.intertek.com

Page 13 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Mr. Upendra R. Oza
STANDARD CARPETS IND LLC
Industrial Area no.1 PO Box 27977
AE- SHARJAH
VERENIGDE ARABISCHE EMIRATEN


your delivery of 2009-05-12 your reference our reference PW/5484 date Zwijnaarde, 2009-06-11

Analysis Report 68886

Required tests :

Determination of the electrical resistance
Assessment of static electrical propensity - walking test
Determination of sound absorption
Determination of impact sound insulation
Determination of thermal resistance by the guarded hot plate apparatus

Identification number	Information given by the client	Date of receipt
T905007	FRS Loop Pile Polypropylene Carpet Tile (Tetris)	2009-05-12


Petra Wittevrongel
order responsible

For further information, please contact our sectorial adviser Jo Wynendaele

This report runs in 6 pages and may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel. The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples.



VAT BE 0459.218.289
CENTEXBEL-GENT
Technologiepark 7
BE-9052 Zwijnaarde
Tel. + 32 9 220 41 51 • Fax + 32 9 220 49 55
e-mail gent@centexbel.be

Fin. Acc. 210-0472965-45

IBAN BE44 2100 4729 6545

CENTEXBEL-BRUSSELS
Montoyenstraat 24 B2
BE-1000 Brussels

Tel. + 32 2 287 08 30 • Fax + 32 2 230 68 15

www.centexbel.be

Page 1 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference date page
PW/5484 2009-06-11 2 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of the electrical resistance

1. Method:

Applied standard : ISO 10965 (year: 1998)
Deviations of the standard : -
Testing atmosphere : 23°C and 25 % relative humidity
Applied voltage : 500 Volt
Number of specimens : 3
Number of measurements : 6 (2 measurements per specimen)

2. Results:

Date of ending the test: 25-05-2009

test specimen	surface resistance in Ω	vertical resistance in Ω
1	$1,67 \times 10^{12}$	$9,43 \times 10^{11}$
2	$5,00 \times 10^{12}$	$1,35 \times 10^{12}$
3	$5,00 \times 10^{12}$	$1,28 \times 10^{13}$
4	$3,33 \times 10^{12}$	$6,58 \times 10^{11}$
5	$4,55 \times 10^{12}$	$1,28 \times 10^{12}$
6	$2,50 \times 10^{12}$	$1,25 \times 10^{12}$
geometrical mean value	$3,41 \times 10^{12} \Omega$	$1,61 \times 10^{12} \Omega$

Performed in the physical lab under the responsibility of Petra Wittevrongel.

www.centexbel.be

Page 2 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	3 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Assessment of static electrical propensity - walking test1. Method:

Applied standard : ISO 6356 (year: 2000)
method by walking
Deviations of the standard : dimensions of the carpet 200 cm x 100 cm (assembly of 8
pieces of 50 cm x 50 cm)
Atmosphere for conditioning : 23°C and 25% relative humidity
Conditioning time : at least 7 days
Number of measurements : 3

2. Results:

Date of ending the test: 25-05-2009

measurement	body voltage (kVolts)
	with Neolite sole
1	0.0
2	0.1
3	0.2
average	0.1

Performed under accreditation in the physical lab under the responsibility of Philippe Lemaire.

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	4 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of sound absorption

1. Method:

Performed in the external lab : Schall- und Wärmemeßstelle Aachen GmbH

2. Results:

Date of ending the test : 27-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	5 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of impact sound insulation

1. Method:

Performed in the external lab : Schall- und Wärmemeßstelle Aachen GmbH

2. Results:

Date of ending the test : 27-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	6 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of thermal resistance by the guarded hot plate apparatus

1. Method:

Performed in the external lab : Ghent University, Faculty of Engineering (Department of Textiles)

2. Results:

Date of ending the test : 29-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.

WWW.Kiliet.com

Kiliet

Standard Carpets

**Schall- und Wärmemeßstelle Aachen GmbH**

Institut für schalltechnische und wärmetechnische Prüfungen - Beratung - Planung

SWA GmbH

Im Grüntal 22 · 52 066 Aachen

Telefon (0241) 970 220

Telefax (0241) 572 956

Geschäftsführung:

Dipl.-Ing. Bernd Gebing

Dr.-Ing. Lothar Siebel

Amtsgericht Aachen · HRB 2708

Labor: Hauptstr. 133 · 52 477 Alsdorf

VMPA - Schallschutzprüfstelle DIN 4109

Staatlich anerkannte Sachverständige

für den Schall- u. Wärmeschutz K-Bau NRW

Bankverbindung: Sparkasse Aachen
(BLZ 390 500 00) Kto.-Nr. 11 011 194

27.05.2009

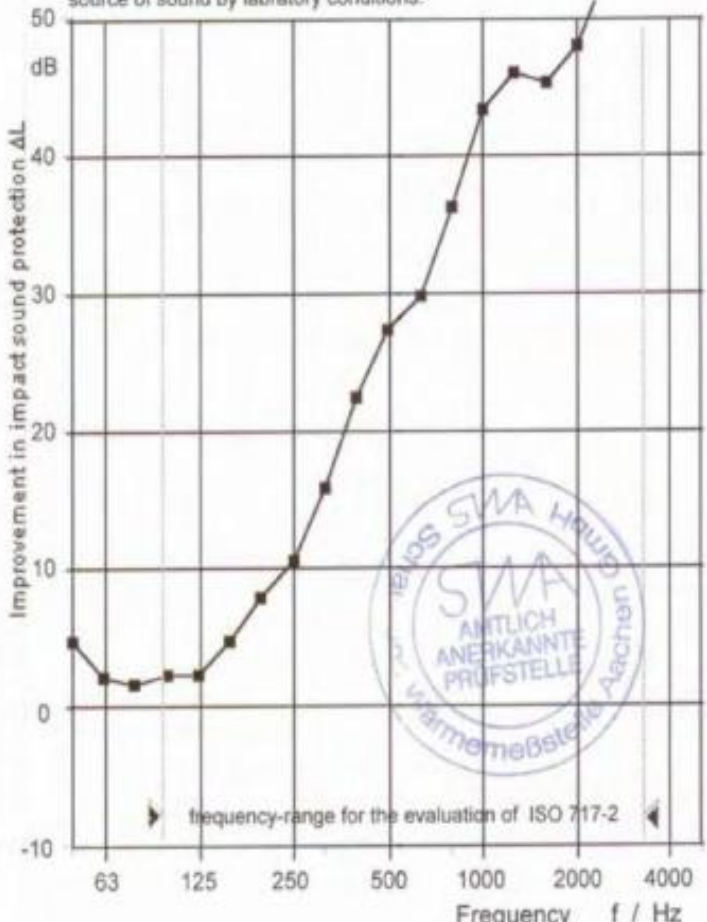

TEST REPORT NO. : CT190509B TS**Impact sound insulation of ISO 140-8 : 1998 - 03**

Date of test: 19.05.2009

Customer: CENTEXBEL

Tested material: T905007

laid loose on a 140 mm thick reinforced concrete floor slab

Test results		Enclosure TS																																																																					
Impact sound insulation of ISO 140-8 : 1998 - 03		Page 2 of 2																																																																					
Measurement of impact sound insulation by a floor covering - on a solid strings-floor																																																																							
Customer: CENTEXBEL																																																																							
Tested material: T905007 Test rooms: 02 u. K2, Hauptstraße 133, 52 477 Aisdorf Test area: 4,24 m x 4,15 m Test area of slab Date of test: 19.05.2009																																																																							
Description of the test material: Total thickness: - mm Mass / area: - kg/m ² laid loose on a 140 mm thick reinforced concrete floor slab																																																																							
Receiving room: Volume: 58,9 m ³ Temperature: 20 °C Humidity: 65 %																																																																							
The results are based on tests, which were effected with on artificial source of sound by laboratory conditions.																																																																							
<table border="1"> <thead> <tr> <th>Frequency</th> <th>Ln</th> <th>ΔL</th> </tr> <tr> <th>Hz</th> <th>Bare floor</th> <th>dB</th> </tr> </thead> <tbody> <tr><td>50</td><td></td><td>4,9</td></tr> <tr><td>63</td><td></td><td>2,3</td></tr> <tr><td>80</td><td></td><td>1,8</td></tr> <tr><td>100</td><td>61,0</td><td>2,5</td></tr> <tr><td>125</td><td>61,4</td><td>2,4</td></tr> <tr><td>160</td><td>64,8</td><td>4,9</td></tr> <tr><td>200</td><td>63,7</td><td>8,0</td></tr> <tr><td>250</td><td>65,4</td><td>10,7</td></tr> <tr><td>315</td><td>65,6</td><td>16,0</td></tr> <tr><td>400</td><td>66,1</td><td>22,4</td></tr> <tr><td>500</td><td>66,0</td><td>27,3</td></tr> <tr><td>630</td><td>66,4</td><td>29,8</td></tr> <tr><td>800</td><td>66,3</td><td>36,4</td></tr> <tr><td>1000</td><td>66,2</td><td>43,4</td></tr> <tr><td>1250</td><td>66,6</td><td>46,0</td></tr> <tr><td>1600</td><td>67,2</td><td>45,3</td></tr> <tr><td>2000</td><td>67,1</td><td>47,9</td></tr> <tr><td>2500</td><td>67,0</td><td>53,7</td></tr> <tr><td>3150</td><td>66,4</td><td>54,2</td></tr> <tr><td>4000</td><td></td><td>---</td></tr> <tr><td>5000</td><td></td><td>---</td></tr> </tbody> </table>	Frequency	Ln	ΔL	Hz	Bare floor	dB	50		4,9	63		2,3	80		1,8	100	61,0	2,5	125	61,4	2,4	160	64,8	4,9	200	63,7	8,0	250	65,4	10,7	315	65,6	16,0	400	66,1	22,4	500	66,0	27,3	630	66,4	29,8	800	66,3	36,4	1000	66,2	43,4	1250	66,6	46,0	1600	67,2	45,3	2000	67,1	47,9	2500	67,0	53,7	3150	66,4	54,2	4000		---	5000		---	 Improvement in impact sound protection ΔL dB Frequency f / Hz frequency-range for the evaluation of ISO 717-2	
Frequency	Ln	ΔL																																																																					
Hz	Bare floor	dB																																																																					
50		4,9																																																																					
63		2,3																																																																					
80		1,8																																																																					
100	61,0	2,5																																																																					
125	61,4	2,4																																																																					
160	64,8	4,9																																																																					
200	63,7	8,0																																																																					
250	65,4	10,7																																																																					
315	65,6	16,0																																																																					
400	66,1	22,4																																																																					
500	66,0	27,3																																																																					
630	66,4	29,8																																																																					
800	66,3	36,4																																																																					
1000	66,2	43,4																																																																					
1250	66,6	46,0																																																																					
1600	67,2	45,3																																																																					
2000	67,1	47,9																																																																					
2500	67,0	53,7																																																																					
3150	66,4	54,2																																																																					
4000		---																																																																					
5000		---																																																																					
Reception filter: third-octave Calculation according ISO 717-2:																																																																							
Impact sound improvement index $\Delta L_w = 24 \text{ dB}$ (VM = 24 dB)	non rated reduction of impact sound insulation $\Delta L_{lin} = \Delta L_w + C_{l,\Delta}$ $\Delta L_{lin} = 12 \text{ dB}$	$C_{l,\Delta} = -12 \text{ dB}$ $C_{l,r} = 1 \text{ dB}$ $C_{l,r,50-2500} = 4 \text{ dB}$																																																																					
Test report no.: CT190509B TS Aachen 27.05.2009	SWA Schall- und Wärmemeßstelle Aachen GmbH  (Dipl.-Ing. A. Siebel)  (Dipl.-Ing. L. Siebel)																																																																						

**Schall- und Wärmemeßstelle Aachen GmbH**

Institut für schalltechnische und wärmetechnische Prüfungen - Beratung - Planung

SWA GmbH

Im Grüental 22 - 52 066 Aachen

Telefon (0241) 970 220

Telefax (0241) 972 956

Geschäftsführung:

Dipl.-Ing. Bernd Gebing

Dr.-Ing. Lothar Siebel

Amtsgericht Aachen - HRB 2708

Labor: Hauptstr. 133 - 52 477 Alsdorf

VMPA Schallschutzprüfstelle DIN 4109

Staatlich anerkannte Sachverständige

für den Schall- u. Wärmeschutz IK-Bau NRW

Bankverbindung: Sparkasse Aachen

(BLZ 390 500 00) Kto.-Nr. 11 011 194

27.05.2009

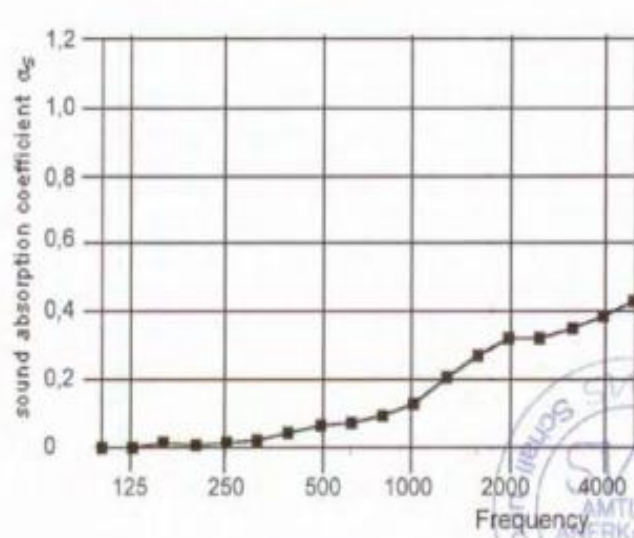
TEST REPORT NO. : CT190509B SA**Sound absorption of DIN EN ISO 354 : 2003 - 12**

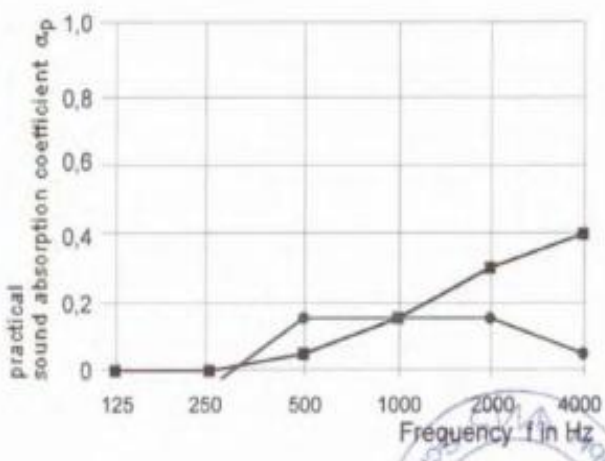

Date of test: 19.05.2009

Customer: CENTEXBEL

Tested material: T905007

laid loose on the floor of the reverberation room

4. Test results		Enclosure SA														
Sound absorption DIN EN ISO 354 : 2003 - 12 Measurement of sound absorption in a reverberation room Customer: CENTEXBEL		Page 2 of 4														
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m ² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m ² laid loose on the floor of the reverberation room Dimension of the test area: length: 4,00 m width: 3,00 m																
Reverberation room: Basic plan: trapezoid <table border="1"> <thead> <tr> <th>f / Hz</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>α_s</td> <td>0,00</td> <td>0,01</td> <td>0,06</td> <td>0,13</td> <td>0,32</td> <td>0,39</td> </tr> </tbody> </table> Volume: 211 m ³ Temperature: 20 °C Humidity: 65 %			f / Hz	125	250	500	1000	2000	4000	α_s	0,00	0,01	0,06	0,13	0,32	0,39
f / Hz	125	250	500	1000	2000	4000										
α_s	0,00	0,01	0,06	0,13	0,32	0,39										
Surface areas of reverberation room: 213 m ² Surface areas of reflectors in reverberation room: 54,5 m ² Reflectors: 6 Alu panels of 1,0 m/ 2,0 m 7 Plywood panels of 1,5 m/ 1,3 m 1 Alu panels of 1,8 m/ 0,9 m																
 Test sound: third-octave noise Reception filter: third-octave																
Test report no.: CT190509B SA Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH (Dr.-Ing. A. Siebel)														

4.1 Valuation of test results		Enclosure SA														
Soundabsorber for the application in buildings - valuation of sound absorption Sound absorption of DIN EN ISO 11654 : 1997- 07 Customer: CENTEXBEL		Page 3 of 4														
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m ² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m ² laid loose on the floor of the reverberation room																
frequency - range of the "shapeindi- cators"		<table border="1"> <thead> <tr> <th>Frequency in Hz</th> <th>pactical sound absorption coefficient</th> </tr> </thead> <tbody> <tr> <td>125</td> <td>0,00</td> </tr> <tr> <td>250</td> <td>0,00</td> </tr> <tr> <td>500</td> <td>0,05</td> </tr> <tr> <td>1000</td> <td>0,15</td> </tr> <tr> <td>2000</td> <td>0,30</td> </tr> <tr> <td>4000</td> <td>0,40</td> </tr> </tbody> </table>	Frequency in Hz	pactical sound absorption coefficient	125	0,00	250	0,00	500	0,05	1000	0,15	2000	0,30	4000	0,40
Frequency in Hz	pactical sound absorption coefficient															
125	0,00															
250	0,00															
500	0,05															
1000	0,15															
2000	0,30															
4000	0,40															
Results:  Relation - curve: 	<table border="1"> <thead> <tr> <th>Reverberation room:</th> <th></th> </tr> </thead> <tbody> <tr> <td>Basic plan:</td> <td>trapezoid</td> </tr> <tr> <td>Volume:</td> <td>211 m³</td> </tr> <tr> <td>Temperature:</td> <td>20 °C</td> </tr> <tr> <td>Humidity:</td> <td>65 %</td> </tr> <tr> <td>Surfaces areas of reverberation room:</td> <td>213 m²</td> </tr> <tr> <td>Surfaces areas of reflectors in reverberation room:</td> <td>54,5 m²</td> </tr> </tbody> </table>		Reverberation room:		Basic plan:	trapezoid	Volume:	211 m ³	Temperature:	20 °C	Humidity:	65 %	Surfaces areas of reverberation room:	213 m ²	Surfaces areas of reflectors in reverberation room:	54,5 m ²
Reverberation room:																
Basic plan:	trapezoid															
Volume:	211 m ³															
Temperature:	20 °C															
Humidity:	65 %															
Surfaces areas of reverberation room:	213 m ²															
Surfaces areas of reflectors in reverberation room:	54,5 m ²															
		Evaluated sound absorptions grade α_w $\alpha_w : 0,15 (- - H) ^ { *) }$														
*) It is recommended insistently to use this singular valuation with complete curve of sound absorption garde.																
Test report no.: CT190509B SA Aachen 27.05.2009	SWA Schall- und Wärmemeßstelle Aachen GmbH  (Dipl.-Ing. A. Siebel)  (Dipl.-Ing. L. Siebel)															

4.2 Test results		Enclosure SA																																																									
Reverberation times Measurement of sound absorption in a reverberation room Customer: CENTEXBEL		Page 4 of 4																																																									
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m² laid loose on the floor of the reverberation room Dimension of the test area: length: 4,00 m width: 3,00 m Reverberation times: <table border="1"> <thead> <tr> <th>f / Hz</th> <th>T1 / s</th> <th>T2 / s</th> </tr> </thead> <tbody> <tr><td>100</td><td>9,96</td><td>9,91</td></tr> <tr><td>125</td><td>7,82</td><td>7,79</td></tr> <tr><td>160</td><td>6,73</td><td>6,48</td></tr> <tr><td>200</td><td>7,29</td><td>7,10</td></tr> <tr><td>250</td><td>7,20</td><td>6,98</td></tr> <tr><td>315</td><td>6,22</td><td>5,95</td></tr> <tr><td>400</td><td>6,57</td><td>6,02</td></tr> <tr><td>500</td><td>6,89</td><td>6,00</td></tr> <tr><td>630</td><td>6,93</td><td>5,87</td></tr> <tr><td>800</td><td>6,55</td><td>5,39</td></tr> <tr><td>1000</td><td>6,48</td><td>5,00</td></tr> <tr><td>1250</td><td>6,31</td><td>4,34</td></tr> <tr><td>1600</td><td>5,93</td><td>3,79</td></tr> <tr><td>2000</td><td>5,42</td><td>3,38</td></tr> <tr><td>2500</td><td>4,65</td><td>3,05</td></tr> <tr><td>3150</td><td>3,99</td><td>2,68</td></tr> <tr><td>4000</td><td>3,24</td><td>2,26</td></tr> <tr><td>5000</td><td>2,59</td><td>1,86</td></tr> </tbody> </table>			f / Hz	T1 / s	T2 / s	100	9,96	9,91	125	7,82	7,79	160	6,73	6,48	200	7,29	7,10	250	7,20	6,98	315	6,22	5,95	400	6,57	6,02	500	6,89	6,00	630	6,93	5,87	800	6,55	5,39	1000	6,48	5,00	1250	6,31	4,34	1600	5,93	3,79	2000	5,42	3,38	2500	4,65	3,05	3150	3,99	2,68	4000	3,24	2,26	5000	2,59	1,86
f / Hz	T1 / s	T2 / s																																																									
100	9,96	9,91																																																									
125	7,82	7,79																																																									
160	6,73	6,48																																																									
200	7,29	7,10																																																									
250	7,20	6,98																																																									
315	6,22	5,95																																																									
400	6,57	6,02																																																									
500	6,89	6,00																																																									
630	6,93	5,87																																																									
800	6,55	5,39																																																									
1000	6,48	5,00																																																									
1250	6,31	4,34																																																									
1600	5,93	3,79																																																									
2000	5,42	3,38																																																									
2500	4,65	3,05																																																									
3150	3,99	2,68																																																									
4000	3,24	2,26																																																									
5000	2,59	1,86																																																									
Number of loudspeaker positions: 2 Number of microphone positions: 2 x 6		Test sound: third-octave noise Reception filter: third-octave																																																									
Test report no.: CT190509B SA Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH 																																																									

SGS

Test Report

No. SDFS1907004534FF

Date: Aug.13, 2019

Page 1 of 14

STANDARD CARPETS IND. L.L.C

SAIH SHUAIB 2, DUBAI INDUSTRIAL CITY, P.O BOX : 490014, DUBAI (UAE)

The following sample(s) was / were submitted and identified on behalf of the client as:

Sample Description : 100 % SOLUTION DYED POLYPROPYLENE CARPET TILE
Sample Receiving Date : Jul.23, 2019
Test Performing Date : Jul.23, 2019 to Aug.13, 2019
Test Result(s) : For further details, please refer to the following page(s).

Signed for and on behalf of
Shunde Branch
SGS-CSTC Co., Ltd.



Irvette Zhang
Approved signatory



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone (86-755) 8307 8888, or email: CN.Checkback@sgs.com

中国·广东·佛山顺德江大南路办事处工业检测部 电话: 830300 传真: (86-757)22805888 电子邮箱: sgs.china@sgs.com
中国·广东·佛山顺德江大南路办事处工业检测部 电话: 830300 传真: (86-757)22805888 电子邮箱: sgs.china@sgs.com

Member of the SGS Group (SGS SA)

Page 1 of 14

WWW.Kiliet.com

Kiliet

Standard Carpets



Test Report

No. SDFS1907004534FF

Date: Aug.13, 2019

Page 1 of 14

STANDARD CARPETS IND. L.L.C.

SAIH SHUAIB 2, DUBAI INDUSTRIAL CITY, P.O BOX : 490014, DUBAI (UAE)

The following sample(s) was / were submitted and identified on behalf of the client as:

Sample Description : 100 % SOLUTION DYED POLYPROPYLENE CARPET TILE

Sample Receiving Date : Jul.23, 2019

Test Performing Date : Jul.23, 2019 to Aug.13, 2019

Test Result(s) : For further details, please refer to the following page(s).

Signed for and on behalf of
Shunde Branch
SGS-CSTC Co., Ltd.

death

Invette Zhang
Approved signatory



900-876-2266 • www.hugoboss.com

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed hereat, available on request or accessible at <http://www.ags.com/terms-and-conditions> and, for electronic form documents, subject to Terms and Conditions for Electronic Documents at <http://www.ags.com/terms-and-conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of its mandate. The Company does not assume any liability for the accuracy or completeness of the information contained in this transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or signature of this document is strictly prohibited and may result in civil or criminal prosecution. If this document is otherwise stated in the results shown in the last report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone (86-755) 8307 1883, or email: CH.Overbeck@kva.com

中国·广东·佛山顺德区大良街道东平北路工业新城东平路1号17楼 邮编: 528331 | 86-757-22805888 | 86-757-22805858 | www.agagroup.com.cn
中国·广东·佛山顺德区大良街道东平北路工业新城东平路1号17楼 邮编: 528331 | 86-757-22805888 | 86-757-22805858 | aga.china@aga.com

Member of the SGS Group (SGS SA)

Page 1 of 14

WWW.Kiliet.com

Kiliet

Standard Carpets

SGS

Test Report

No. SDFS1907004534FF

Date: Aug.13, 2019

Page 2 of 14

Test Result Summary

No.	Test(s) Requested	Result(s)	Comments
1	16 CFR 1631 —Standard for the surface flammability of small carpets and rugs (FF 2-70)	PASS	/
	ISO 6925:1982 Textile floor Coverings —Burning behavior- Tablet test at ambient temperature	Refer to next page(s)	/
2	To determine the Cadmium(Cd) content(s) in the submitted sample(s).	See Results	/
	To determine the Carcinogenic Disperse Dyes content(s) in the submitted sample(s).	See Results	/
	Determination of Azodyes in the submitted sample(s) with reference to the Entry 43 of Commission Regulation (EC) No 552/2009 amending Annex XVII of REACH Regulation (EC) No 1907/2006 (previously restricted under Directive 2002/61/EC).	See Results	/
	Major Composition Qualitative Analysis ASTM E1252-98(2013): ¹	Polypropylene(PP)	/
4	Colour Fastness To Rubbing (ISO 105-X12:2016; Size of rubbing finger: 19 x 25.4mm)	Refer to next page(s)	/
	Colour Fastness To Water (ISO 105-E01:2013; test specimen in vertical position)	Refer to next page(s)	/
	Formaldehyde (ISO 14184-1:2011.)	Refer to next page(s)	/
	Formaldehyde (ISO 14184-2:2011; Analysis was performed by UV-Vis.)	Refer to next page(s)	/
5	Tensile Force ISO 11857-1999	49.0N	/
For further details, please refer to the following page(s)			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its observation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1643, or email: CN-Check@sgs.com

SGS (China) Limited, Registered Office: 11/F, 12/F, 13/F, 14/F, 15/F, 16/F, 17/F, 18/F, 19/F, 20/F, 21/F, 22/F, 23/F, 24/F, 25/F, 26/F, 27/F, 28/F, 29/F, 30/F, 31/F, 32/F, 33/F, 34/F, 35/F, 36/F, 37/F, 38/F, 39/F, 40/F, 41/F, 42/F, 43/F, 44/F, 45/F, 46/F, 47/F, 48/F, 49/F, 50/F, 51/F, 52/F, 53/F, 54/F, 55/F, 56/F, 57/F, 58/F, 59/F, 60/F, 61/F, 62/F, 63/F, 64/F, 65/F, 66/F, 67/F, 68/F, 69/F, 70/F, 71/F, 72/F, 73/F, 74/F, 75/F, 76/F, 77/F, 78/F, 79/F, 80/F, 81/F, 82/F, 83/F, 84/F, 85/F, 86/F, 87/F, 88/F, 89/F, 90/F, 91/F, 92/F, 93/F, 94/F, 95/F, 96/F, 97/F, 98/F, 99/F, 100/F, 101/F, 102/F, 103/F, 104/F, 105/F, 106/F, 107/F, 108/F, 109/F, 110/F, 111/F, 112/F, 113/F, 114/F, 115/F, 116/F, 117/F, 118/F, 119/F, 120/F, 121/F, 122/F, 123/F, 124/F, 125/F, 126/F, 127/F, 128/F, 129/F, 130/F, 131/F, 132/F, 133/F, 134/F, 135/F, 136/F, 137/F, 138/F, 139/F, 140/F, 141/F, 142/F, 143/F, 144/F, 145/F, 146/F, 147/F, 148/F, 149/F, 150/F, 151/F, 152/F, 153/F, 154/F, 155/F, 156/F, 157/F, 158/F, 159/F, 160/F, 161/F, 162/F, 163/F, 164/F, 165/F, 166/F, 167/F, 168/F, 169/F, 170/F, 171/F, 172/F, 173/F, 174/F, 175/F, 176/F, 177/F, 178/F, 179/F, 180/F, 181/F, 182/F, 183/F, 184/F, 185/F, 186/F, 187/F, 188/F, 189/F, 190/F, 191/F, 192/F, 193/F, 194/F, 195/F, 196/F, 197/F, 198/F, 199/F, 200/F, 201/F, 202/F, 203/F, 204/F, 205/F, 206/F, 207/F, 208/F, 209/F, 210/F, 211/F, 212/F, 213/F, 214/F, 215/F, 216/F, 217/F, 218/F, 219/F, 220/F, 221/F, 222/F, 223/F, 224/F, 225/F, 226/F, 227/F, 228/F, 229/F, 230/F, 231/F, 232/F, 233/F, 234/F, 235/F, 236/F, 237/F, 238/F, 239/F, 240/F, 241/F, 242/F, 243/F, 244/F, 245/F, 246/F, 247/F, 248/F, 249/F, 250/F, 251/F, 252/F, 253/F, 254/F, 255/F, 256/F, 257/F, 258/F, 259/F, 260/F, 261/F, 262/F, 263/F, 264/F, 265/F, 266/F, 267/F, 268/F, 269/F, 270/F, 271/F, 272/F, 273/F, 274/F, 275/F, 276/F, 277/F, 278/F, 279/F, 280/F, 281/F, 282/F, 283/F, 284/F, 285/F, 286/F, 287/F, 288/F, 289/F, 290/F, 291/F, 292/F, 293/F, 294/F, 295/F, 296/F, 297/F, 298/F, 299/F, 300/F, 301/F, 302/F, 303/F, 304/F, 305/F, 306/F, 307/F, 308/F, 309/F, 310/F, 311/F, 312/F, 313/F, 314/F, 315/F, 316/F, 317/F, 318/F, 319/F, 320/F, 321/F, 322/F, 323/F, 324/F, 325/F, 326/F, 327/F, 328/F, 329/F, 330/F, 331/F, 332/F, 333/F, 334/F, 335/F, 336/F, 337/F, 338/F, 339/F, 340/F, 341/F, 342/F, 343/F, 344/F, 345/F, 346/F, 347/F, 348/F, 349/F, 350/F, 351/F, 352/F, 353/F, 354/F, 355/F, 356/F, 357/F, 358/F, 359/F, 360/F, 361/F, 362/F, 363/F, 364/F, 365/F, 366/F, 367/F, 368/F, 369/F, 370/F, 371/F, 372/F, 373/F, 374/F, 375/F, 376/F, 377/F, 378/F, 379/F, 380/F, 381/F, 382/F, 383/F, 384/F, 385/F, 386/F, 387/F, 388/F, 389/F, 390/F, 391/F, 392/F, 393/F, 394/F, 395/F, 396/F, 397/F, 398/F, 399/F, 400/F, 401/F, 402/F, 403/F, 404/F, 405/F, 406/F, 407/F, 408/F, 409/F, 410/F, 411/F, 412/F, 413/F, 414/F, 415/F, 416/F, 417/F, 418/F, 419/F, 420/F, 421/F, 422/F, 423/F, 424/F, 425/F, 426/F, 427/F, 428/F, 429/F, 430/F, 431/F, 432/F, 433/F, 434/F, 435/F, 436/F, 437/F, 438/F, 439/F, 440/F, 441/F, 442/F, 443/F, 444/F, 445/F, 446/F, 447/F, 448/F, 449/F, 450/F, 451/F, 452/F, 453/F, 454/F, 455/F, 456/F, 457/F, 458/F, 459/F, 460/F, 461/F, 462/F, 463/F, 464/F, 465/F, 466/F, 467/F, 468/F, 469/F, 470/F, 471/F, 472/F, 473/F, 474/F, 475/F, 476/F, 477/F, 478/F, 479/F, 480/F, 481/F, 482/F, 483/F, 484/F, 485/F, 486/F, 487/F, 488/F, 489/F, 490/F, 491/F, 492/F, 493/F, 494/F, 495/F, 496/F, 497/F, 498/F, 499/F, 500/F, 501/F, 502/F, 503/F, 504/F, 505/F, 506/F, 507/F, 508/F, 509/F, 510/F, 511/F, 512/F, 513/F, 514/F, 515/F, 516/F, 517/F, 518/F, 519/F, 520/F, 521/F, 522/F, 523/F, 524/F, 525/F, 526/F, 527/F, 528/F, 529/F, 530/F, 531/F, 532/F, 533/F, 534/F, 535/F, 536/F, 537/F, 538/F, 539/F, 540/F, 541/F, 542/F, 543/F, 544/F, 545/F, 546/F, 547/F, 548/F, 549/F, 550/F, 551/F, 552/F, 553/F, 554/F, 555/F, 556/F, 557/F, 558/F, 559/F, 560/F, 561/F, 562/F, 563/F, 564/F, 565/F, 566/F, 567/F, 568/F, 569/F, 570/F, 571/F, 572/F, 573/F, 574/F, 575/F, 576/F, 577/F, 578/F, 579/F, 580/F, 581/F, 582/F, 583/F, 584/F, 585/F, 586/F, 587/F, 588/F, 589/F, 590/F, 591/F, 592/F, 593/F, 594/F, 595/F, 596/F, 597/F, 598/F, 599/F, 600/F, 601/F, 602/F, 603/F, 604/F, 605/F, 606/F, 607/F, 608/F, 609/F, 610/F, 611/F, 612/F, 613/F, 614/F, 615/F, 616/F, 617/F, 618/F, 619/F, 620/F, 621/F, 622/F, 623/F, 624/F, 625/F, 626/F, 627/F, 628/F, 629/F, 630/F, 631/F, 632/F, 633/F, 634/F, 635/F, 636/F, 637/F, 638/F, 639/F, 640/F, 641/F, 642/F, 643/F, 644/F, 645/F, 646/F, 647/F, 648/F, 649/F, 650/F, 651/F, 652/F, 653/F, 654/F, 655/F, 656/F, 657/F, 658/F, 659/F, 660/F, 661/F, 662/F, 663/F, 664/F, 665/F, 666/F, 667/F, 668/F, 669/F, 670/F, 671/F, 672/F, 673/F, 674/F, 675/F, 676/F, 677/F, 678/F, 679/F, 680/F, 681/F, 682/F, 683/F, 684/F, 685/F, 686/F, 687/F, 688/F, 689/F, 690/F, 691/F, 692/F, 693/F, 694/F, 695/F, 696/F, 697/F, 698/F, 699/F, 700/F, 701/F, 702/F, 703/F, 704/F, 705/F, 706/F, 707/F, 708/F, 709/F, 710/F, 711/F, 712/F, 713/F, 714/F, 715/F, 716/F, 717/F, 718/F, 719/F, 720/F, 721/F, 722/F, 723/F, 724/F, 725/F, 726/F, 727/F, 728/F, 729/F, 730/F, 731/F, 732/F, 733/F, 734/F, 735/F, 736/F, 737/F, 738/F, 739/F, 740/F, 741/F, 742/F, 743/F, 744/F, 745/F, 746/F, 747/F, 748/F, 749/F, 750/F, 751/F, 752/F, 753/F, 754/F, 755/F, 756/F, 757/F, 758/F, 759/F, 760/F, 761/F, 762/F, 763/F, 764/F, 765/F, 766/F, 767/F, 768/F, 769/F, 770/F, 771/F, 772/F, 773/F, 774/F, 775/F, 776/F, 777/F, 778/F, 779/F, 780/F, 781/F, 782/F, 783/F, 784/F, 785/F, 786/F, 787/F, 788/F, 789/F, 790/F, 791/F, 792/F, 793/F, 794/F, 795/F, 796/F, 797/F, 798/F, 799/F, 800/F, 801/F, 802/F, 803/F, 804/F, 805/F, 806/F, 807/F, 808/F, 809/F, 810/F, 811/F, 812/F, 813/F, 814/F, 815/F, 816/F, 817/F, 818/F, 819/F, 820/F, 821/F, 822/F, 823/F, 824/F, 825/F, 826/F, 827/F, 828/F, 829/F, 830/F, 831/F, 832/F, 833/F, 834/F, 835/F, 836/F, 837/F, 838/F, 839/F, 840/F, 841/F, 842/F, 843/F, 844/F, 845/F, 846/F, 847/F, 848/F, 849/F, 850/F, 851/F, 852/F, 853/F, 854/F, 855/F, 856/F, 857/F, 858/F, 859/F, 860/F, 861/F, 862/F, 863/F, 864/F, 865/F, 866/F, 867/F, 868/F, 869/F, 870/F, 871/F, 872/F, 873/F, 874/F, 875/F, 876/F, 877/F, 878/F, 879/F, 880/F, 881/F, 882/F, 883/F, 884/F, 885/F, 886/F, 887/F, 888/F, 889/F, 890/F, 891/F, 892/F, 893/F, 894/F, 895/F, 896/F, 897/F, 898/F, 899/F, 900/F, 901/F, 902/F, 903/F, 904/F, 905/F, 906/F, 907/F, 908/F, 909/F, 910/F, 911/F, 912/F, 913/F, 914/F, 915/F, 916/F, 917/F, 918/F, 919/F, 920/F, 921/F, 922/F, 923/F, 924/F, 925/F, 926/F, 927/F, 928/F, 929/F, 930/F, 931/F, 932/F, 933/F, 934/F, 935/F, 936/F, 937/F, 938/F, 939/F, 940/F, 941/F, 942/F, 943/F, 944/F, 945/F, 946/F, 947/F, 948/F, 949/F, 950/F, 951/F, 952/F, 953/F, 954/F, 955/F, 956/F, 957/F, 958/F, 959/F, 960/F, 961/F, 962/F, 963/F, 964/F, 965/F, 966/F, 967/F, 968/F, 969/F, 970/F, 971/F, 972/F, 973/F, 974/F, 975/F, 976/F, 977/F, 978/F, 979/F, 980/F, 981/F, 982/F, 983/F, 984/F, 985/F, 986/F, 987/F, 988/F, 989/F, 990/F, 991/F, 992/F, 993/F, 994/F, 995/F, 996/F, 997/F, 998/F, 999/F, 1000/F, 1001/F, 1002/F, 1003/F, 1004/F, 1005/F, 1006/F, 1007/F, 1008/F, 1009/F, 1010/F, 1011/F, 1012/F, 1013/F, 1014/F, 1015/F, 1016/F, 1017/F, 1018/F, 1019/F, 1020/F, 1021/F, 1022/F, 1023/F, 1024/F, 1025/F, 1026/F, 1027/F, 1028/F, 1029/F, 1030/F, 1031/F, 1032/F, 1033/F, 1034/F, 1035/F, 1036/F, 1037/F, 1038/F, 1039/F, 1040/F, 1041/F, 1042/F, 1043/F, 1044/F, 1045/F, 1046/F, 1047/F, 1048/F, 1049/F, 1050/F, 1051/F, 1052/F, 1053/F, 1054/F, 1055/F, 1056/F, 1057/F, 1058/F, 1059/F, 1060/F, 1061/F, 1062/F, 1063/F, 1064/F, 1065/F, 1066/F, 1067/F, 1068/F, 1069/F, 1070/F, 1071/F, 1072/F, 1073/F, 1074/F, 1075/F, 1076/F, 1077/F, 1078/F, 1079/F, 1080/F, 1081/F, 1082/F, 1083/F, 1084/F, 1085/F, 1086/F, 1087/F, 1088/F, 1089/F, 1090/F, 1091/F, 1092/F, 1093/F, 1094/F, 1095/F, 1096/F, 1097/F, 1098/F, 1099/F, 1100/F, 1101/F, 1102/F, 1103/F, 1104/F, 1105/F, 1106/F, 1107/F, 1108/F, 1109/F, 1110/F, 1111/F, 1112/F, 1113/F, 1114/F, 1115/F, 1116/F, 1117/F, 1118/F, 1119/F, 1120/F, 1121/F, 1122/F, 1123/F, 1124/F, 1125/F, 1126/F, 1127/F, 1128/F, 1129/F, 1130/F, 1131/F, 1132/F, 1133/F, 1134/F, 1135/F, 1136/F, 1137/F, 1138/F, 1139/F, 1140/F, 1141/F, 1142/F, 1143/F, 1144/F, 1145/F, 1146/F, 1147/F, 1148/F, 1149/F, 1150/F, 1151/F, 1152/F, 1153/F, 1154/F, 1155/F, 1156/F, 1157/F, 1158/F, 1159/F, 1160/F, 1161/F, 1162/F, 1163/F, 1164/F, 1165/F, 1166/F, 1167/F, 1168/F, 1169/F, 1170/F, 1171/F, 1172/F, 1173/F, 1174/F, 1175/F, 1176/F, 1177/F, 1178/F, 1179/F, 1180/F, 1181/F, 1182/F, 1183/F, 1184/F, 1185/F, 1186/F, 1187/F, 1188/F, 1189/F, 1190/F, 1191/F, 1192/F, 1193/F, 1194/F, 1195/F, 1196/F, 1197/F, 1198/F, 1199/F, 1200/F, 1201/F, 1202/F, 1203/F, 1204/F, 1205/F, 1206/F, 1207/F, 1208/F, 1209/F, 1210/F, 1211/F, 1212/F, 1213/F, 1214/F, 1215/F, 1216/F, 1217/F, 1218/F, 1219/F, 1220/F, 1221/F, 1222/F, 1223/F, 1224/F, 1225/F, 1226/F, 1227/F, 1228/F, 1229/F, 1230/F, 1231/F, 1232/F, 1233/F, 1234/F, 1235/F, 1236/F, 1237/F, 1238/F, 1239/F, 1240/F, 1241/F, 1242/F, 1243/F, 1244/F, 1245/F, 1246/F, 1247/F, 1248/F, 1249/F, 1250/F, 1251/F, 1252/F, 1253/F, 1254/F, 1255/F, 1256/F, 1257/F, 1258/F, 1259/F, 1260/F, 1261/F, 1262/F, 1263/F, 1264/F, 1265/F, 1266/F, 1267/F, 1268/F, 1269/F, 1270/F, 1271/F, 1272/F, 1273/F, 1274/F, 1275/F, 1276/F, 1277/F, 1278/F, 1279/F, 1280/F, 1281/F, 1282/F, 1283/F, 1284/F, 1285/F, 1286/F, 1287/F, 1288/F, 1289/F, 1290/F, 1291/F, 1292/F, 1293/F, 1294/F, 1295/F, 1296/F, 1297/F, 1298/F, 1299/F, 1300/F, 1301/F, 1302/F, 1303/F, 1304/F, 1305/F, 1306/F, 1307/F, 1308/F, 1309/F, 1310/F, 1311/F, 1312/F, 1313/F, 1314/F, 1315/F, 1316/F, 1317/F, 1318/F, 1319/F, 1320/F, 1321/F, 1322/F, 1323/F, 1324/F, 1325/F, 1326/F, 1327/F, 1328/F, 1329/F, 1330/F, 1331/F, 1332/F, 1333/F, 1334/F, 1335/F, 1336/F, 1337/F, 1338/F, 1339/F, 1340/F, 1341/F, 1342/F, 1343/F, 1344/F, 1345/F, 1346/F, 1347/F, 1348/F, 1349/F, 1350/F, 1351/F, 1352/F, 1353/F, 1354/F, 1355/F, 1356/F, 1357/F, 1358/F, 1359/F, 1360/F, 1361/F, 1362/F, 1363/F, 1364/F, 1365/F, 1366/F, 1367/F, 1368/F, 1369/F, 1370/F, 1371/F, 1372/F, 1373/F, 1374/F, 1375/F, 1376/F, 1377/F, 1378/F, 1379/F, 1380/F, 1381/F, 1382/F, 1383/F, 1384/F, 1385/F, 1386/F, 1387/F, 1388/F, 1389/F, 1390/F, 1391/F, 1392/F, 1393/F, 1394/F, 1395/F, 1396/F, 1397/F, 1398/F, 1399/F, 1400/F, 1401/F, 1402/F, 1403/F, 1404/F, 1405/F, 1406/F, 1407/F, 1408/F, 1409/F, 1410/F, 1411/F, 1412/F, 1413/F, 1414/F, 1415/F, 1416/F, 1417/F, 1418/F, 1419/F, 1420/F, 1421/F, 1422/F, 1423/F, 1424/F, 1425/F, 1426/F, 1427/F, 1428/F, 1429/F, 1430/F, 1431/F, 1432/F, 1433/F, 1434/F, 1435/F, 1436/F, 1437/F, 1438/F, 1439/F, 1440/F, 1441/F, 1442/F, 1443/F, 1444/F, 1445/F, 1446/F, 1447/F, 1448/F, 1449/F, 1450/F, 1451/F, 1452/F, 1453/F, 1454/F, 1455/F, 1456/F, 1457/F, 1458/F, 1459/F, 1460/F, 1461/F, 1462/F, 1463/F, 1464/F, 1465/F, 1466/F, 1467/F, 1468/F, 1469/F, 1470/F, 1471/F, 1472/F, 1473/F, 1474/F, 1475/F, 1476/F, 1477/F, 1478/F, 1479/F, 1480/F, 1481/F, 1482/F, 1483/F, 1484/F, 1485/F, 1486/F, 1487/F, 1488/F, 1489/F, 1490/F, 1491/F, 1492/F, 1493/F, 1494/F, 1495/F, 1496/F, 1497/F, 1498/F, 1499/F, 1500/F, 1501/F, 1502/F, 1503/F, 1504/F, 1505/F, 1506/F, 1507/F, 1508/F, 1509/F, 1510/F, 1511/F, 1512/F, 1513/F, 1514/F, 1515/F, 1516/F, 1517/F, 1518/F, 1519/F, 1520/F, 1521/F, 1522/F, 1523/F, 1524/F, 1525/F, 1526/F, 1527/F, 1528/F, 1529/F, 1530/F, 1531/F, 1532/F, 1533/F, 1534/F, 1535/F, 1536/F, 1537/F, 1538/F, 1539/F, 1540/F, 1541/F, 1542/F, 1543/F, 1544/F, 1545/F, 1546/F, 1547/F, 1548/F, 1549/F, 1550/F, 1551/F, 1552/F, 1553/F, 1554/F, 1555/F, 1556/F, 1557/F, 1558/F, 1559/F, 1560/F, 1561/F, 1562/F, 1563/F, 1564/F, 1565/F, 1566/F, 1567/F, 1568/F, 1569/F, 1570/F, 1571/F, 1572/F, 1573/F, 1574/F, 1575/F, 1576/F, 1577/F, 1578/F, 1579/F, 1580/F, 1581/F, 1582/F, 1583/F, 1584/F, 1585/F, 1586/F, 1587/F, 1588/F, 1589/F, 1590/F, 1591/F, 1592/F, 1593/F, 1594/F, 1595/F, 1596/F, 1597/F, 1598/F, 1599/F, 1600/F, 1601/F, 1602/F, 1603/F, 1604/F, 1605/F, 1606/F, 1607/F, 1608/F, 1609/F, 1610/F, 1611/F, 1612/F, 1613/F, 1614/F, 1615/F, 1616/F, 1617/F, 1618/F, 1619/F, 1620/F, 1621/F, 1622/F, 1623/F, 1624/F, 1625/F, 1626/F, 1627/F, 1628/F, 1629/F, 1630/F, 1631/F, 1632/F, 1633/F, 1634/F, 1635/F, 1636/F, 1637/F, 1638/F, 1639/F, 1640/F, 1641/F, 1642/F, 1643/F, 1644/F, 1645/F, 1646/F, 1647/F, 1648/F, 1649/F, 1650/F, 1651/F, 1652/F, 1653/F, 1654/F, 1655/F, 1656/F, 1657/F, 1658/F, 1659/F, 1660/F, 1661/F, 1662/F, 1663/F, 1664/F, 1665/F, 1666/F, 1667/F, 1668/F, 1669/F, 1670/F, 1671/F, 1672/F, 1673/F, 1674/F, 1675/F, 1676/F, 1677/F, 1678/F, 1679/F, 1680/F, 1681/F, 1682/F, 1683/F, 1684/F, 1685/F, 1686/F, 1



Test Report

No. SDFS1907004534FF

Date: Aug.13, 2019

Page 3 of 14

Part 1

Test 1

Test Conducted:

This test is conducted accordance with 16 CFR 1631 Standard for the surface flammability of small carpets and rugs (FF 2-70)

Sample details:

Sample Name	Carpet
Laundering condition	Yes
Conditioning	T: 105°C Duration: 2hours, then cool for 1hour in desiccator

Criteria:

Test criterion	A specimen passes the test if the charred portion does not extend to within 2.54 cm. (1.0 in.) of the edge of the hole in the flattening frame at any point.
Acceptance criterion	At least seven of the eight specimens shall meet the test criterion in order to conform with this Standard.

Test results:

Specimen No.	Whether the charred portion extend to within 2.54 cm. (1.0 in.) of the edge of the hole in the flattening frame at any point	Rating
1	No	Pass
2	No	Pass
3	No	Pass
4	No	Pass
5	No	Pass
6	No	Pass
7	No	Pass
8	No	Pass

Conclusion

As per test method of the 16CFR 1631 contained, the submitted specimens comply with that acceptance criterion.



By using services provided in writing, this document is issued by the Company subject to its General Conditions of Service printed on the back of the envelope or available at <http://www.san.com/termen> and for electronic documents subject to Terms and Conditions for Electronic Documents at <http://www.san.com/termen> and Conditions/Terms a Document.asp. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of the Company's legal and technical capabilities. The Company does not assume any liability for the results of the transaction from asserting all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is strictly prohibited and may result in severe civil and criminal penalties. Any other use of the results shown in this report may refer only to the sample tested and such samples are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 3187 1812, or email: CN.Danchook@fox.com

中国·广东·佛山顺德区大良镇陈涌路五沙湾新嘉利1号裕利工业园一楼厂房内 邮编: 528333 中国·广东·佛山顺德区大良镇陈涌路五沙湾新嘉利1号裕利工业园一楼厂房内 邮编: 528333	528333 (86-757)22956888 (86-757)22956858 528333 (86-757)22956888 (86-757)22956858	www.sgs.com.cn sgs.china@sgs.com.cn
--	--	--

Member of the SGS Group (SGS SA)

Page 3 of 14

WWW.Kiliet.com



Standard Carpets

SGS

Test Report

No. SDFS1907004534FF

Date: Aug.13, 2019

Page 4 of 14

Photo Appendix:



Test 2

Test Conducted:

Based on ISO 6925:1982 Textile floor Coverings –Burning behavior-Tablet test at ambient temperature

I. Sample details

Materials	Carpet
-----------	--------

II. Conditioning

Conditioning	Temperature	Relative humidity
	(20±2) °C	(65±2)%
Test Condition requirement	27.3 °C	65 %

III. Test Result

Specimen No.	The maximum diameter of damage area (mm)	Whether the flame or glowing reaches the edge of the hole in the metal plate.
1	18	No
2	17	No
3	18	No
4	18	No
5	17	No
6	17	No
7	16	No
8	16	No



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/terms-and-conditions.aspx> and, for electronic forest documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8107 1443, or email: CN-Document@sgs.com

中国·广东·佛山顺德龙江镇大良街道办事处工业大道南1号广东轻工职业技术学院 邮编: 528333 | (86-757)22036888 | (86-757)22036858 | www.sgs.com.cn
中国·广东·佛山顺德龙江镇大良街道办事处工业大道南1号广东轻工职业技术学院 邮编: 528333 | (86-757)22036888 | (86-757)22036858 | sgs.china@sgs.com

Member of the SGS Group (SGS SA)

Page 4 of 14

WWW.Kiliet.com

Kiliet

Standard Carpets

SGS

Test Report

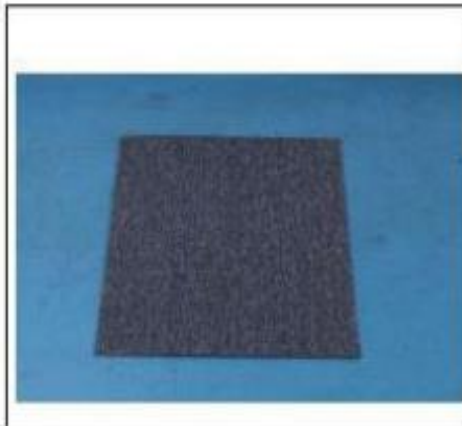
No. SDFS1907004534FF

Date: Aug.13, 2019

Page 5 of 14

Remark: The maximum distance between the centre of the specimen and the edge of the damaged zone using the rule.

Photo Appendix:



Part 2: SGS Ref. No.: CAN19-149956

Test Results :

Test Part Description :

SGS Sample ID	Description
CAN19-149956.001	Dark blue/black fleece sheet with black backing

Remarks :

- (1) 1 mg/kg = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (< MDL)
- (4) "-" = Not Regulated

Cadmium (Cd)

Test Method : SGS In-house method (GZTC CHEM-TOP-004-01, with reference to US EPA Method 3052:1996), analysis was performed by ICP-OES.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention to check the authenticity of testing / inspection report & certificate, please contact us at telephone (86-755) 8301 1643, or email: CN-Backcheck@sgs.com

SGS China Inspection & Testing Services Co., Ltd. 15 F Building, Guangsheng Industrial Park, No. 10, Shuangshu Road, Xixiang Street, Xixiang Town, Shenzhen, Guangdong, China 518103 | (86-757) 22095888 | (86-757) 22095858 | www.sgs.com.cn
中国·广东·佛山市顺德区大良镇沙涌村沙涌路10号广生工业园15楼 邮编: 518103 | (86-757) 22095888 | (86-757) 22095858 | sgs.china@sgs.com

Member of the SGS Group (SGS SA)

Page 5 of 14

WWW.Kiliet.com

Kiliet

Standard Carpets



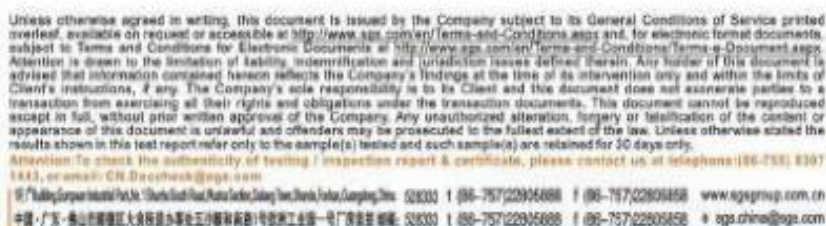
Page 6 of 14

Carcinogenic Disperse Dyes

<u>Test Item(s)</u>	<u>CAS NO.</u>	<u>Unit</u>	<u>MDL</u>	<u>001</u>
Carcinogenic Disperse Dyes				
C.I. Acid Red 26 (Structure No: C.I. 16 150)	3761-53-3	mg/kg	15	ND
C.I. Basic Red 9 (Structure No: C.I. 42 500)	569-61-9	mg/kg	15	ND
C.I. Direct Black 38 (Structure No: C.I. 30 235)	1937-37-7	mg/kg	15	ND
C.I. Direct Blue 6 (Structure No: C.I. 22 610)	2602-46-2	mg/kg	15	ND
C.I. Direct Red 28 (Structure No: C.I. 22 120)	573-58-0	mg/kg	15	ND
C.I. Basic Violet 14 (Structure No: C.I. 42 510)	632-99-5	mg/kg	15	ND
C.I. Disperse orange 11 (Structure No: C.I. 60 700)	82-28-0	mg/kg	15	ND
C.I. Disperse Blue 1 (Structure No: C.I. 64 500)	2475-45-8	mg/kg	15	ND
C.I. Disperse Yellow 3 (Structure No: C.I. 11 855)	2832-40-8	mg/kg	15	ND

Azo Dyes

<u>Test Item(s)</u>	<u>CAS NO.</u>	<u>Unit</u>	<u>MDL</u>	<u>001</u>
4-Aminobiphenyl	92-67-1	mg/kg	5	ND
Benzidine	92-87-5	mg/kg	5	ND
4-chloro-o-toluidine	95-69-2	mg/kg	5	ND
2-naphthylamine	91-59-8	mg/kg	5	ND
o-aminoazotoluene	97-56-3	mg/kg	5	ND
5-nitro-o-toluidine /	99-55-8	mg/kg	5	ND
2-Amino-4-nitrotoluene				
4-chloroaniline	106-47-8	mg/kg	5	ND
4-methoxy-m-phenylenediamine	615-05-4	mg/kg	5	ND



Member of the SGS Group (SGS SA)

SGS

Test Report

No. SDFS1907004534FF

Date: Aug.13, 2019

Page 7 of 14

/ 2,4-Diaminoanisole				
4,4' -diaminodiphenylmethane	101-77-9	mg/kg	5	ND
3,3' -dichlorobenzidine	91-94-1	mg/kg	5	ND
3,3' -dimethoxybenzidine	119-90-4	mg/kg	5	ND
3,3' -dimethylbenzidine	119-93-7	mg/kg	5	ND
3,3'-Dimethyl-4,4'-diaminodiphenylmethane /	838-88-0	mg/kg	5	ND
4,4'-methylenedi-o-toluidine				
p-cresidine	120-71-8	mg/kg	5	ND
4,4' -methylene-bis-(2-chloroaniline)	101-14-4	mg/kg	5	ND
4,4' -oxydianiline	101-80-4	mg/kg	5	ND
4,4' -thiodianiline	139-65-1	mg/kg	5	ND
o-toluidine	95-53-4	mg/kg	5	ND
4-methyl-m-phenylenediamine /	95-80-7	mg/kg	5	ND
2,4-Toluyldiamine				
2,4,5-trimethylaniline	137-17-7	mg/kg	5	ND
4-aminoazobenzene	60-09-3	mg/kg	5	ND
O-Anisidine	90-04-0	mg/kg	5	ND

B.Test Method : With reference to ISO 17234-1:2015, analysis was conducted with GC-MS/HPLC-DAD.

Test Item(s)	CAS NO.	Unit	MDL	001
4-Aminobiphenyl	92-67-1	mg/kg	5	ND
Benzidine	92-87-5	mg/kg	5	ND
4-chloro-o-toluidine	95-69-2	mg/kg	5	ND
2-naphthylamine	91-59-8	mg/kg	5	ND
o-aminoazotoluene	97-56-3	mg/kg	5	ND
5-nitro-o-toluidine /	99-55-8	mg/kg	5	ND
2-Amino-4-nitrotoluene				
4-chloroaniline	106-47-8	mg/kg	5	ND
4-methoxy-m-phenylenediamine / 2,4-Diaminoanisole	615-05-4	mg/kg	5	ND
4,4' -diaminodiphenylmethane	101-77-9	mg/kg	5	ND
3,3' -dichlorobenzidine	91-94-1	mg/kg	5	ND
3,3' -dimethoxybenzidine	119-90-4	mg/kg	5	ND
3,3' -dimethylbenzidine	119-93-7	mg/kg	5	ND
3,3'-Dimethyl-4,4'-diaminodiphenylmethane /	838-88-0	mg/kg	5	ND
4,4'-methylenedi-o-toluidine				
p-cresidine	120-71-8	mg/kg	5	ND
4,4' -methylene-bis-	101-14-4	mg/kg	5	ND



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising at their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone (+86-755) 8307-1843, or email: CN.Sixcheck@sgs.com

SGS (China) Inspection & Testing Services Co., Ltd. 中国·广东·佛山顺德容桂大涌街道办事处五沙路新嘉园1号欧洲工业园一号楼四楼 邮编: 528333 1 (86-757)22805888 1 (86-757)22805858 www.sgs.com.cn 中国·广东·佛山顺德容桂大涌街道办事处五沙路新嘉园1号欧洲工业园一号楼四楼 邮编: 528333 1 (86-757)22805888 1 (86-757)22805858 * sgs.china@sgs.com

Member of the SGS Group (SGS SA)

Page 7 of 14

WWW.Kiliet.com

Kiliet

Standard Carpets

SGS

Test Report

No. SDFS1907004534FF

Date: Aug.13, 2019

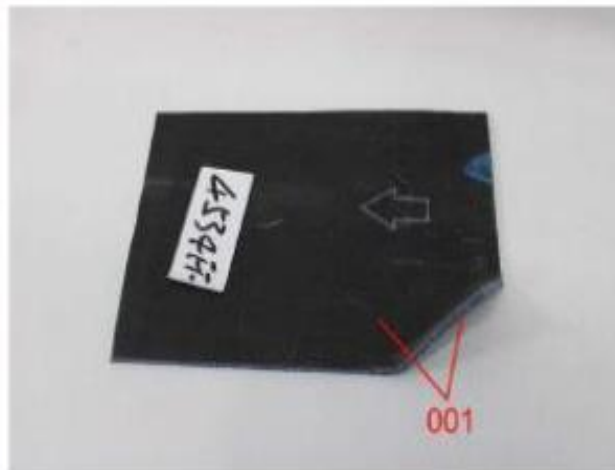
Page 8 of 14

(2-chloroaniline)				
4,4' -oxydianiline	101-80-4	mg/kg	5	ND
4,4' -thiodianiline	139-65-1	mg/kg	5	ND
o-toluidine	95-53-4	mg/kg	5	ND
4-methyl-m-phenylenediamine	95-80-7	mg/kg	5	ND
/ 2,4-Toluylenediamine				
2,4,5-trimethylaniline	137-17-7	mg/kg	5	ND
4-aminoazobenzene	60-09-3	mg/kg	5	ND
O-Anisidine	90-04-0	mg/kg	5	ND
2,4-Xylidine	95-68-1	mg/kg	5	ND
2,6-Xylidine	87-62-7	mg/kg	5	ND

Notes :

- (1) Test specimen was taken randomly from the sample submitted by client/applicant.
- (2) Whenever 4-aminodiphenyl (CAS number 92-67-1), 2-naphylamine (CAS number 91-59-8) and 4-methoxy-m-phenylene-diamine (CAS number 615-05-4) is found, the use of banned azo colorants cannot be reliably ascertained without additional information, e.g. the chemical structure of the colorants used.
- (3) In case polyurethane materials are used, e.g. PU foams and coatings and in prints, it cannot be ruled out that certain amines, e.g. 4,4'-methylene-dianiline (MDA, CAS number 101-77-9) and 2,4-toluylen-diamine (TDA, CAS number 95-80-7) are released from the PU component and not from a banned azo colorant.
- (4) In case of pigment prints care has to be taken that 4,4'-methylene-dianiline (MDA, CAS number 101-77-9) is not released from a source of banned azo colorants but from e.g. a chemical fixing agent.

Sample photo:



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone (86-755) 8387 1443, or email: CN-Check@sgs.com

SGS (China) Inspection & Testing Services Co., Ltd. 中国·广东·佛山·禅城区·大涌镇·沙涌村·工业一路·广佛国际工业城·广佛国际工业城·广佛国际工业城 邮编: 528000 | (86-757)22805888 | (86-757)22805888 | (86-757)22805888 | www.sgs.com.cn | sgs.china@sgs.com

Member of the SGS Group (SGS SA)

Page 8 of 14

WWW.Kiliet.com

Kiliet

Standard Carpets

SGS

Test Report

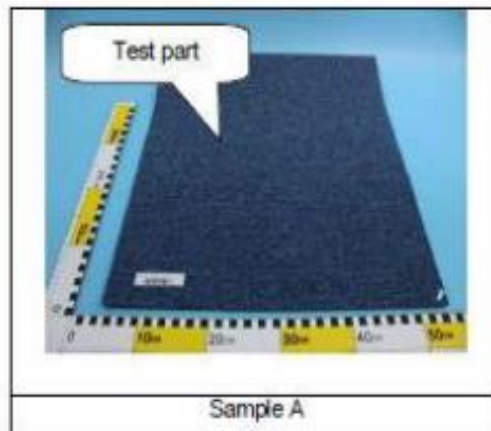
No. SDFS1907004534FF

Date: Aug.13, 2019

Page 9 of 14

Part 3: SGS Ref. No.: GZIN1908041367MR

Original Sample Photo:



Test Item: Major Composition Qualitative Analysis

Sample Description: See photo

Test Method: ASTM E1252-98(2013)¹, analysis was performed by FTIR.

Sample Technique: Hot-pressed film

Test Result:

Sample	Major composition
A	Polypropylene(PP) (FTIR spectrum see Fig.1)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/ter/terma-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terma-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8387 1443, email: CR.Despatch@sgs.com

SGS (China) Inspection & Testing Services Co., Ltd.
Shanghai Branch

9F, Building 1, Guangming Road, Putuo District, Shanghai, China
中国·上海·浦东新区光明路9号9楼901室 邮编: 200333 | (86-757) 22805888 | (86-757) 22805888 | www.sgs.com.cn
中国·广东·佛山顺德碧桂园大道1号1楼101室 邮编: 528333 | (86-757) 22805888 | (86-757) 22805888 | sgs.china@sgs.com

Member of the SGS Group (SGS SA)

Page 9 of 14

WWW.Kiliet.com

Kiliet

Standard Carpets

SGS

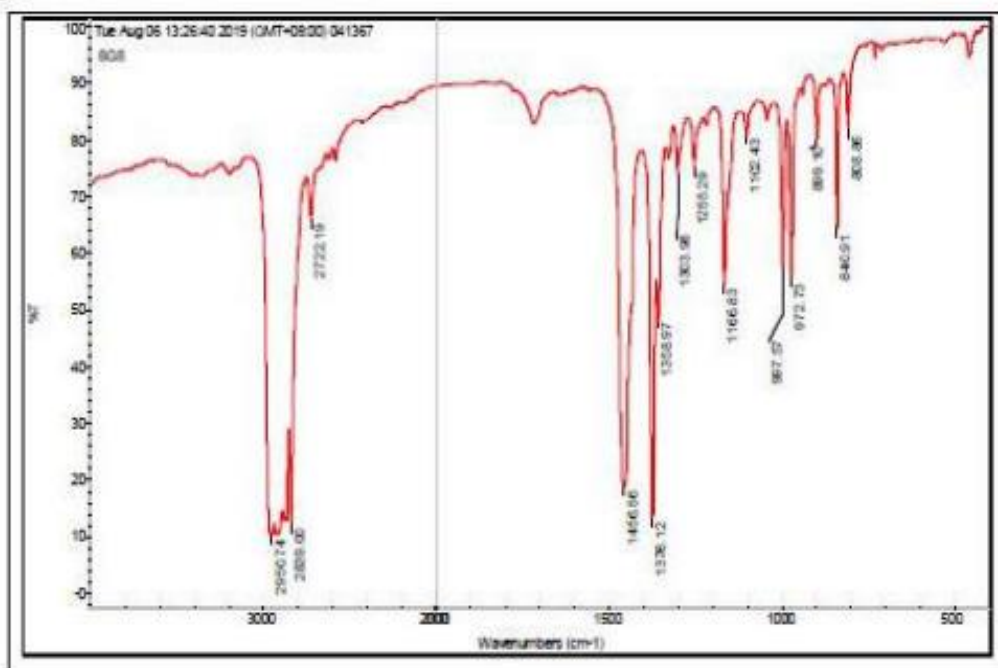
Test Report

No. SDFS1907004534FF

Date: Aug.13, 2019

Page 10 of 14

Fig.1



Equipment Information:

Equipment	Model	Equipment No.	Calibration date	Next Calibration date
FTIR	NICOLET 5700	GZMR-PL-E028	2018-09-07	2019-09-06



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8107 1443, or email: CN.Support@sgs.com

中国·广东·佛山·禅城区江大及民路办事处王少卿 电话: 028333 1 (86-757)22806888 f (86-757)22806858 www.sgs.com.cn
中国·广东·佛山·禅城区江大及民路办事处王少卿 电话: 028333 1 (86-757)22806888 f (86-757)22806858 e sgs.china@sgs.com

Member of the SGS Group (SGS SA)

Page 10 of 14

WWW.Kiliet.com

Kiliet

Standard Carpets



Test Report

No. SDFS1907004534FF

Date: Aug.13, 2019

Page 11 of 14

Part 4: SGS Ref. No.: SL91939276232101TX

Test Results

Colour Fastness To Rubbing

(ISO 105-X12:2016: Size of rubbing finger: 19 x 25.4mm)

As Received

-	Unit	(A)	Requirement
Dry Staining	-	4	-
Wet Staining	-	4	-

Remark: Grey Scale Rating is based on the 5-step scale of 1 to 5, where 1 is worst and 5 is best.

Colour Fastness To Water

(ISO 105-E01:2013: test specimen in vertical position)

	Unit	(A)	Requirement
Change In Shade	-	4-5	-
Staining On Multi-fibre Stripe			
Acetate	-	4-5	-
Cotton	-	4-5	-
Nylon	-	4-5	-
Polyester	-	4-5	-
Acrylic	-	4-5	-
Wool	-	4-5	-

Remark: Grey Scale Rating is based on the 5-step scale of 1 to 5, where 1 is worst and 5 is best.

Formaldehyde

(ISO 14184-1:2011.)

	Cas No	Result (mg/kg) Sample (A)
Formaldehyde Requirement -	50-00-0	ND

Note:

ND = Not Detected

1ppm = 1 mg/kg

* = Exceed the limit

Detection limit = 16 mg/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed hereon, available on request or accessible at <http://www.sgc.com/terms/Forms-and-Conditions.aspx>, and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgc.com/terms-and-conditions/Terms-a-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any further of this document is subject to the Company's standard terms of business, including its freight and/or forwarding policy and where the recipient is not the Client's instructions, if any, the Company's sole responsibility. The Client and the document owner shall be jointly and severally liable to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, copied, altered or used in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or signature, is strictly prohibited. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone (96-735) 8397 1443, or email: CN.Detect@china.com

中国·广东·佛山顺德龙江镇人仕立工业园五福路1号广东欧格集团 528333 1 (86-757)22804888 f (86-757)22804858 www.egsgroup.com.cn
 中国·广东·佛山顺德龙江镇人仕立工业园五福路1号广东欧格集团 528333 1 (86-757)22804888 f (86-757)22804858 s.ogs.china@ogs.com.cn

Member of the SGS Group (SGS SA)

Page 11 of 14

WWW.Kiliet.com



Standard Carpets

SGS

Test Report

No. SDFS1907004534FF

Date: Aug.13, 2019

Page 12 of 14

Formaldehyde

ISO 14184-2:2011; Analysis was performed by UV-Vis.)

	Cas No	Result (mg/kg) Sample (A)
Formaldehyde Requirement	50-00-0	20

Note:
ND = Not Detected
1ppm = 1 mg/kg
* = Exceed the limit
Detection limit = 16 mg/kg

Sample Photo



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed hereon, available on request or accessible at <http://www.sgs.com.cn/term-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.cn/term-and-conditions/term-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 5443, or email: CN.Docscheck@sgs.com

SGS (China) Inspection & Testing Services Co., Ltd.
中国·广东·佛山顺德龙江镇大良路11号 邮编: 528333 电话: (86-757) 22906888 传真: (86-757) 22805858 网站: www.sgs.com.cn
中国·广东·佛山顺德龙江镇大良路11号 邮编: 528333 电话: (86-757) 22906888 传真: (86-757) 22805858 网站: www.sgs.com.cn

Member of the SGS Group (SGS SA)

Page 12 of 14

WWW.Kiliet.com

Kiliet

Standard Carpets

SGS

Test Report

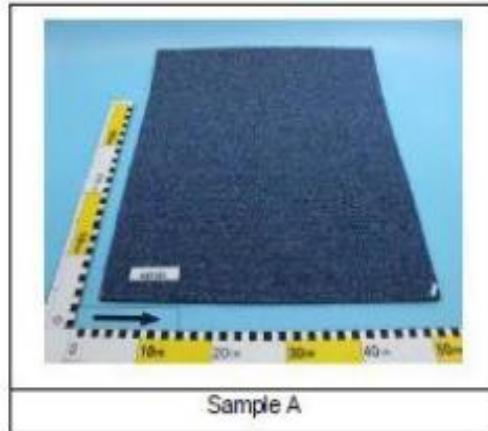
No. SDFS1907004534FF

Date: Aug.13, 2019

Page 13 of 14

Part 5: SGS Ref. No.: GZIN1908042039MR

Original Sample Photo:



Test Item: Tensile Force

Sample Description: See photo

Test Method: ISO 11857-1999

Test Condition:

Specimen width: 50mm

Testing speed: 300mm/min

Lab Environmental Condition: (23±2)°C, (50±5)%RH

Test Result:

Test Item	Test Result
Tensile Force	49.0N

Note: Test specimens were cut from the sample.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/terms-a-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction clauses defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone (86-755) 8107 1442, or email CN.Seccheck@sgs.com

SGS (S) China Inspection & Testing Services Co., Ltd. Shanghai Branch
 中国·广东·佛山顺德龙江大道东办事处五沙顺和新城计华工业园一号楼四楼 邮编: 528303 T: (86-757)22804888 F: (86-757)22804858 www.sgs.com.cn
 中国·广东·佛山顺德龙江大道东办事处五沙顺和新城计华工业园一号楼四楼 邮编: 528303 T: (86-757)22804888 F: (86-757)22804858 * sgs.china@sgs.com

Member of the SGS Group (SGS SA)

Page 13 of 14

WWW.Kiliet.com

Kiliet

Standard Carpets

SGS

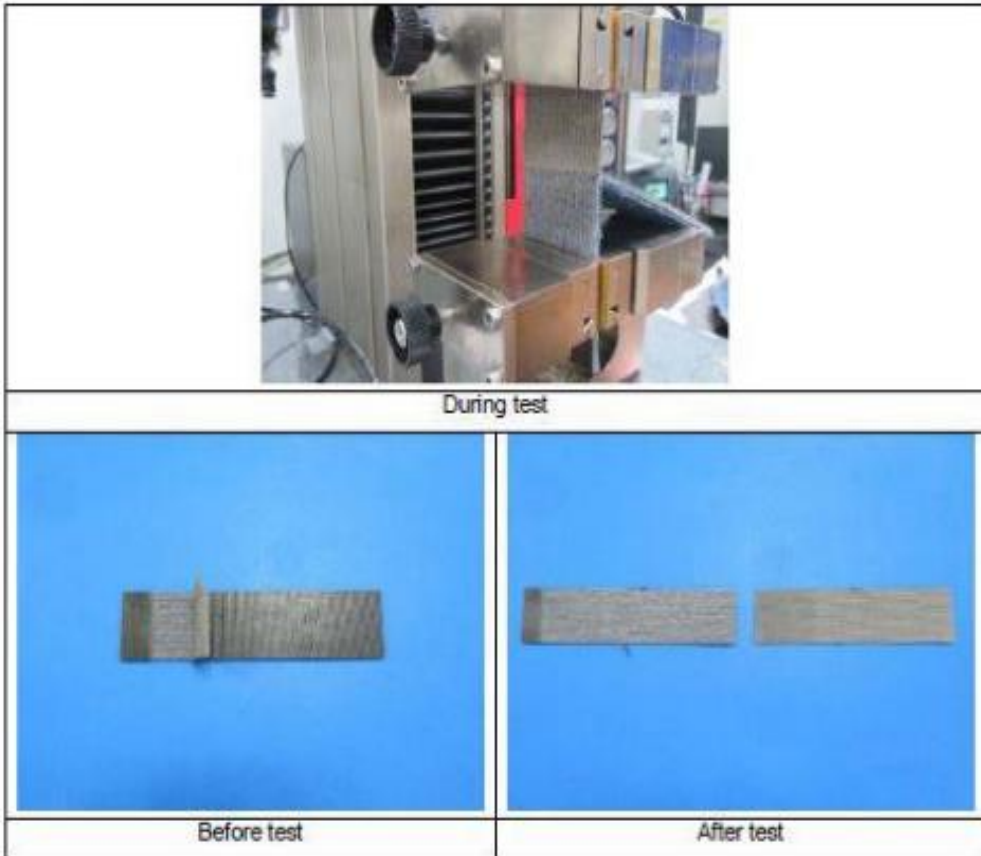
Test Report

No. SDFS1907004534FF

Date: Aug.13, 2019

Page 14 of 14

Test Photo:



Equipment Information:

Equipment	Model	Equipment No.	Calibration date	Next Calibration date
Universal Testing Machine	Z1.0	GZMR-PL-E168	2019-04-16	2020-04-15

Remark: Part 2 & 3, 4, 5 test was subcontracted to SGS-CSTC Standards Technical Services Co.,Ltd. Guangzhou Branch.

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8387 1413, or email: CN.Sales@sgs.com

中国·广东·佛山顺德龙江大道东边沙涌村新街1号 中国·广东·佛山顺德龙江大道东边沙涌村新街1号 中国·广东·佛山顺德龙江大道东边沙涌村新街1号 中国·广东·佛山顺德龙江大道东边沙涌村新街1号 中国·广东·佛山顺德龙江大道东边沙涌村新街1号 中国·广东·佛山顺德龙江大道东边沙涌村新街1号 中国·广东·佛山顺德龙江大道东边沙涌村新街1号 中国·广东·佛山顺德龙江大道东边沙涌村新街1号 中国·广东·佛山顺德龙江大道东边沙涌村新街1号 中国·广东·佛山顺德龙江大道东边沙涌村新街1号

Member of the SGS Group (SGS SA)

Page 14 of 14

WWW.Kiliet.com

Kiliet

Standard Carpets



Standard Carpets ind llc
Mr. Upendra R. Oza
Industrial Area no.1 PO Box 27977
SHARJAH
Verenigde Arabische Emiraten



Your notice of
13-12-2012

Your reference

Date
04-01-2013

Analysis Report 12.05464.01

Required tests :

CFR 1630-FF 1-70

Standard for the surface flammability of carpets and rugs.

Identification number	Information given by the client	Date of receipt
T1217795	Polypropylene Graphic Carpet Tile with Vinyl backing	13-12-2012



Pros Van Hoeyland

Order responsible

This report runs to 2 pages and may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel.

The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples. In assessing compliance with the specifications, we did not take into account the uncertainty on the test results.

VAT BE 0459.218.289

Fin. Acc. 210-0472965-45

IBAN BE44 2100 4729 6545

CENTEXBEL-GENT
Technologiepark 7
BE-9052 Zwijnaarde

Tel. + 32 9 220 41 51 • Fax + 32 9 220 49 55
gent@centexbel.be

CENTEXBEL-VERVIERS
Avenue du Parc 38
BE-4650 Herve (Chalmeux)

Tel. + 32 87 32 24 30 Fax + 32 87 34 05 18
chalmeux@centexbel.be

www.centexbel.be

Page 1 of 2

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 12.05464.01

Date 04-01-2013

Page 2/2

Reference: T1217795 - Polypropylene Graphic Carpet Tile with Vinyl backing

Standard for the surface flammability of carpets and rugs.

Date of ending the test 04-01-2013

Standard used CFR 1630-FF 1-70 & 1631-FF 2-70

Deviation from the standard -

Conditioning 2 hours in a drying oven at 105 °C. After drying cooled to room temperature in a desiccator.

The specimens have been taken from the material as supplied

No cleaning procedure has been applied prior to testing.

Specimens have been tested loose laid on a standard non-combustible substrate.

	Flame time or time to reach the edge	Max. damage from centre point of specimen (mm).	Charred area ≤ 25 mm from inside edge (1).
#1	1 min 59 s	12	no
#2	1 min 49 s	11	no
#3	2 min 41 s	11	no
#4	2 min 09 s	10	no
#5	1 min 52 s	12	no
#6	2 min 04 s	12	no
#7	2 min 13 s	10	no
#8	2 min 21 s	15	no

(1) "yes" if the max. damage from the centre point is ≥ 76 mm or when flames reach the inside edge.

Test criterion

A specimen fails the test if the charred area reaches a distance of 25 mm or less, from the inside edge of the template.

Acceptance criterion

At least seven of the eight specimens shall meet the test criterion in order to conform with the standard.

Conclusion

Pass

Performed under accreditation in the fire lab under the responsibility of Pros Van Hoeyland

GREEN LABEL PLUS

INDOOR AIR QUALITY TESTING PROGRAM
THIS CERTIFIES THAT

Standard Carpets

Address: PO Box 490014,
Dubai, United Arab Emirates

HAS MET THE REQUIREMENTS OF THE CARPET AND RUG INSTITUTE'S
GREEN LABEL PLUS PROGRAM FOR CATEGORY:

31X Pre-dyed Polypropylene with PVC Backing

Private Office Range of Total VOCs:
0.5 mg/m³ or less

School Classroom Range of Total VOCs:
0.5 mg/m³ or less

Product Type: Modular Tile

Joe W. Yarbrough, President
The Carpet and Rug Institute, Inc.

Certification Date: May 23, 2018
Expiration Date: June 30, 2023

To view all GLP-Certified products visit www.carpet-rug.org/glpproducts.

Page 1 of 1



THE CARPET AND RUG INSTITUTE
100 SOUTH HAMILTON STREET
DALTON GA 30720-4612 UNITED STATES



GLP100096

This product complies with
California DPH Section 01350
Version 1.2

A USGBC® recognized third
party certification program
for LEED v4.1 EQ Credit
Low-Emitting Materials.



WWW.Kiliet.com

Kiliet

Standard Carpets



Mr. Upendra R. Oza
STANDARD CARPETS IND LLC
Industrial Area no.1 PO Box 27977
AE- SHARJAH
VERENIGDE ARABISCHE EMIRATEN

your delivery of
2009-05-12

your reference

our reference
PW/5484


date
Zwijnaarde, 2009-06-11

Analysis Report 68886

Required tests :

Determination of the electrical resistance
Assessment of static electrical propensity - walking test
Determination of sound absorption
Determination of impact sound insulation
Determination of thermal resistance by the guarded hot plate apparatus

Identification number	Information given by the client	Date of receipt
T905007	FRS Loop Pile Polypropylene Carpet Tile (Tetris)	2009-05-12


Petra Wittevrongel
order responsible

For further information, please contact our sectorial adviser Jo Wynendaele

This report runs to 6 pages and may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel. The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples.



VAT BE 0459.218.289
CENTEXBEL-GENT
Technologiepark 7
BE-9052 Zwijnaarde
Tel. + 32 9 220 41 51 • Fax + 32 9 220 49 55
e-mail gent@centexbel.be

Fin. Acc. 210-0472965-45

IBAN BE44 2100 4729 6545

CENTEXBEL-BRUSSELS
Montoyerstraat 24 B2
BE-1000 Brussels
Tel. + 32 2 287 08 30 • Fax + 32 2 230 68 15

www.centexbel.be

Page 1 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference date page
PW/5484 2009-06-11 2 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of the electrical resistance

1. Method:

Applied standard : ISO 10965 (year: 1998)
Deviations of the standard : -
Testing atmosphere : 23°C and 25 % relative humidity
Applied voltage : 500 Volt
Number of specimens : 3
Number of measurements : 6 (2 measurements per specimen)

2. Results:

Date of ending the test: 25-05-2009

test specimen	surface resistance in Ω	vertical resistance in Ω
1	$1,67 \times 10^{12}$	$9,43 \times 10^{11}$
2	$5,00 \times 10^{12}$	$1,35 \times 10^{12}$
3	$5,00 \times 10^{12}$	$1,28 \times 10^{13}$
4	$3,33 \times 10^{12}$	$6,58 \times 10^{11}$
5	$4,55 \times 10^{12}$	$1,28 \times 10^{12}$
6	$2,50 \times 10^{12}$	$1,25 \times 10^{12}$
geometrical mean value	$3,41 \times 10^{12} \Omega$	$1,61 \times 10^{12} \Omega$

Performed in the physical lab under the responsibility of Petra Wittevrongel.

www.centexbel.be

Page 2 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference date page
PW/5484 2009-06-11 3 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Assessment of static electrical propensity - walking test

1. Method:

Applied standard : ISO 6356 (year: 2000)
method by walking
Deviations of the standard : dimensions of the carpet 200 cm x 100 cm (assembly of 8
pieces of 50 cm x 50 cm)
Atmosphere for conditioning : 23°C and 25% relative humidity
Conditioning time : at least 7 days
Number of measurements : 3

2. Results:

Date of ending the test: 25-05-2009

measurement	body voltage (kVolts)
	with Neolite sole
1	0.0
2	0.1
3	0.2
average	0.1

Performed under accreditation in the physical lab under the responsibility of Philippe Lemaire.

www.centexbel.be

Page 3 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	4 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of sound absorption

1. Method:

Performed in the external lab : Schall- und Wärmemeßstelle Aachen GmbH

2. Results:

Date of ending the test : 27-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.



Analysis Report 68886

our reference

PW/5484

date

2009-06-11

page

5 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of impact sound insulation1. Method:

Performed in the external lab : Schall- und Wärmemeßstelle Aachen GmbH

2. Results:

Date of ending the test : 27-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.



Analysis Report 68886

our reference	date	page
PW/5484	2009-06-11	6 / 6

Reference : T905007 - FRS Loop Pile Polypropylene Carpet Tile (Tetris)

Determination of thermal resistance by the guarded hot plate apparatus

1. Method:

Performed in the external lab : Ghent University, Faculty of Engineering (Department of Textiles)

2. Results:

Date of ending the test : 29-05-2009

See analysis report enclosed.

Centexbel is not responsible for the test results.

www.centexbel.be

Page 6 of 13

WWW.Kiliet.com

Kiliet

Standard Carpets

**Schall- und Wärmemeßstelle Aachen GmbH**

Institut für schalltechnische und wärmetechnische Prüfungen - Beratung - Planung

SWA GmbH

Im Grüntal 22 · 52 066 Aachen

Telefon (0241) 970 220

Telefax (0241) 572 956

Geschäftsführung:

Dipl.-Ing. Bernd Gebing

Dr.-Ing. Lothar Siebel

Amtsgericht Aachen · HRB 2708

Labor: Hauptstr. 133 · 52 477 Alsdorf

VMPA: Schallschutzprüfstelle DIN 4109

Staatlich anerkannte Sachverständige

für den Schall- u. Wärmeschutz iK-Bau NRW

Bankverbindung: Sparkasse Aachen

(BLZ 390 500 00) Kto.-Nr. 11 011 194

27.05.2009

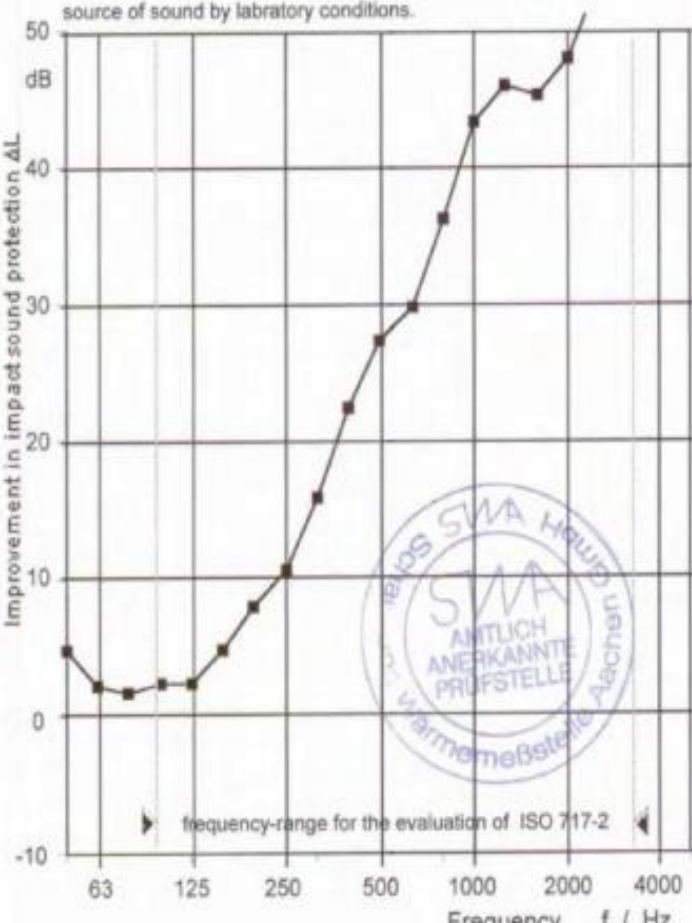


TEST REPORT NO. : CT190509B TS**Impact sound insulation of ISO 140-8 : 1998 - 03**

Date of test: 19.05.2009

Customer: CENTEXBEL

Tested material: T905007

laid loose on a 140 mm thick reinforced concrete floor slab

Test results		Enclosure TS																																																																								
Impact sound insulation of ISO 140-8 : 1998 - 03		Page 2 of 2																																																																								
Measurement of impact sound insulation by a floor covering - on a solid strings-floor																																																																										
Customer: CENTEXBEL																																																																										
Tested material: T905007 Test rooms: 02 u. K2, Hauptstraße 133, 52 477 Aisdorf Test area: 4,24 m x 4,15 m Test area of slab Date of test: 19.05.2009																																																																										
Description of the test material: Total thickness: - mm Mass / area: - kg/m² laid loose on a 140 mm thick reinforced concrete floor slab																																																																										
Receiving room: Volume: 58,9 m³ Temperature: 20 °C Humidity: 65 %																																																																										
The results are based on tests, which were effected with on artificial source of sound by laboratory conditions.																																																																										
<table border="1"> <thead> <tr> <th>Frequency</th> <th>Ln</th> <th>ΔL</th> </tr> <tr> <th>Hz</th> <th>Bare floor</th> <th></th> </tr> <tr> <th></th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr><td>50</td><td></td><td>4,9</td></tr> <tr><td>63</td><td></td><td>2,3</td></tr> <tr><td>80</td><td></td><td>1,8</td></tr> <tr><td>100</td><td>61,0</td><td>2,5</td></tr> <tr><td>125</td><td>61,4</td><td>2,4</td></tr> <tr><td>160</td><td>64,8</td><td>4,9</td></tr> <tr><td>200</td><td>63,7</td><td>8,0</td></tr> <tr><td>250</td><td>65,4</td><td>10,7</td></tr> <tr><td>315</td><td>65,6</td><td>16,0</td></tr> <tr><td>400</td><td>66,1</td><td>22,4</td></tr> <tr><td>500</td><td>66,0</td><td>27,3</td></tr> <tr><td>630</td><td>66,4</td><td>29,8</td></tr> <tr><td>800</td><td>66,3</td><td>36,4</td></tr> <tr><td>1000</td><td>66,2</td><td>43,4</td></tr> <tr><td>1250</td><td>66,6</td><td>46,0</td></tr> <tr><td>1600</td><td>67,2</td><td>45,3</td></tr> <tr><td>2000</td><td>67,1</td><td>47,9</td></tr> <tr><td>2500</td><td>67,0</td><td>53,7</td></tr> <tr><td>3150</td><td>66,4</td><td>54,2</td></tr> <tr><td>4000</td><td></td><td>---</td></tr> <tr><td>5000</td><td></td><td>---</td></tr> </tbody> </table>	Frequency	Ln	ΔL	Hz	Bare floor			dB	dB	50		4,9	63		2,3	80		1,8	100	61,0	2,5	125	61,4	2,4	160	64,8	4,9	200	63,7	8,0	250	65,4	10,7	315	65,6	16,0	400	66,1	22,4	500	66,0	27,3	630	66,4	29,8	800	66,3	36,4	1000	66,2	43,4	1250	66,6	46,0	1600	67,2	45,3	2000	67,1	47,9	2500	67,0	53,7	3150	66,4	54,2	4000		---	5000		---		
Frequency	Ln	ΔL																																																																								
Hz	Bare floor																																																																									
	dB	dB																																																																								
50		4,9																																																																								
63		2,3																																																																								
80		1,8																																																																								
100	61,0	2,5																																																																								
125	61,4	2,4																																																																								
160	64,8	4,9																																																																								
200	63,7	8,0																																																																								
250	65,4	10,7																																																																								
315	65,6	16,0																																																																								
400	66,1	22,4																																																																								
500	66,0	27,3																																																																								
630	66,4	29,8																																																																								
800	66,3	36,4																																																																								
1000	66,2	43,4																																																																								
1250	66,6	46,0																																																																								
1600	67,2	45,3																																																																								
2000	67,1	47,9																																																																								
2500	67,0	53,7																																																																								
3150	66,4	54,2																																																																								
4000		---																																																																								
5000		---																																																																								
Reception filter: third-octave Calculation according ISO 717-2:																																																																										
Impact sound improvement index $\Delta L_w = 24 \text{ dB}$ (VM = 24 dB)	non rated reduction of impact sound insulation $\Delta L_{lin} = \Delta L_w + C_{l,\Delta}$ $\Delta L_{lin} = 12 \text{ dB}$																																																																									
	$C_{l,\Delta} = -12 \text{ dB}$ $C_{l,r} = 1 \text{ dB}$ $C_{l,r,50-2500} = 4 \text{ dB}$																																																																									
Test report no.: CT190509B TS Aachen 27.05.2009	SWA Schall- und Wärmemeßstelle Aachen GmbH  (Dipl.-Ing. A. Siebel)  (Dipl.-Ing. L. Siebel)																																																																									

**Schall- und Wärmemeßstelle Aachen GmbH**

Institut für schalltechnische und wärmetechnische Prüfungen - Beratung - Planung

SWA GmbH

Im Grüntal 22 - 52 066 Aachen

Telefon (0241) 979 220

Telefax (0241) 979 956

Geschäftsführung:

Dipl.-Ing. Bernd Gebing

Dr.-Ing. Lothar Siebel

Amtsgericht Aachen - HRB 2708

Labor: Hauptstr. 133 - 52 477 Alsdorf

VMPA Schallschutzprüfstelle DIN 4109

Staatlich anerkannte Sachverständige
für den Schall- u. Wärmeschutz IK-Bau NRWBankverbindung: Sparkasse Aachen
(BLZ 390 500 00) Kto.-Nr. 11 011 194

27.05.2009

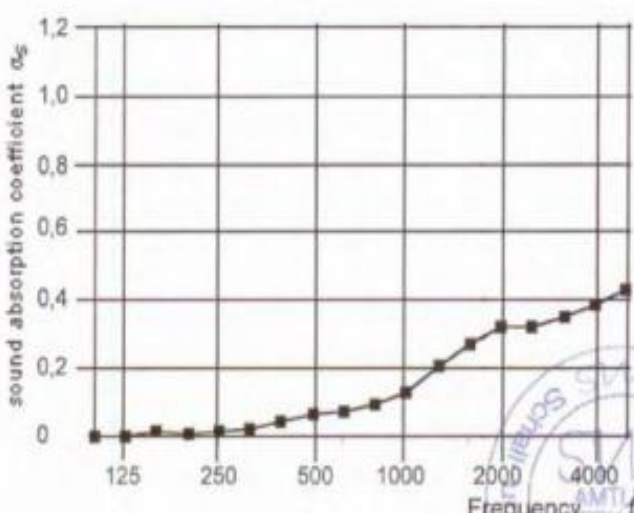
TEST REPORT NO. : CT190509B SA**Sound absorption of DIN EN ISO 354 : 2003 - 12**

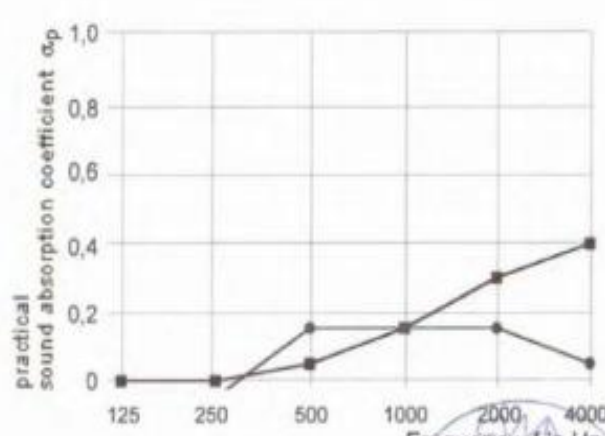
Date of test: 19.05.2009

Customer: CENTEXBEL

Tested material: T905007

laid loose on the floor of the reverberation room

4. Test results		Enclosure SA																												
Sound absorption DIN EN ISO 354 : 2003 - 12		Page 2 of 4																												
Measurement of sound absorption in a reverberation room																														
Customer: CENTEXBEL																														
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m² laid loose on the floor of the reverberation room Dimension of the test area: length: 4,00 m width: 3,00 m																														
Reverberation room: Basic plan: trapezoid <table border="1"> <thead> <tr> <th>f / Hz</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>Volume: 211 m³</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Temperature: 20 °C</td> <td>0,00</td> <td>0,01</td> <td>0,06</td> <td>0,13</td> <td>0,32</td> <td>0,39</td> </tr> <tr> <td>Humidity: 65 %</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>			f / Hz	125	250	500	1000	2000	4000	Volume: 211 m ³							Temperature: 20 °C	0,00	0,01	0,06	0,13	0,32	0,39	Humidity: 65 %						
f / Hz	125	250	500	1000	2000	4000																								
Volume: 211 m ³																														
Temperature: 20 °C	0,00	0,01	0,06	0,13	0,32	0,39																								
Humidity: 65 %																														
Surface areas of reverberation room: 213 m² Surface areas of reflectors in reverberation room: 54,5 m² Reflectors: 6 Alu panels of 1,0 m/ 2,0 m 7 Plywood panels of 1,5 m/ 1,3 m 1 Alu panels of 1,8 m/ 0,9 m																														
 sound absorption coefficient α_s Frequency Test sound: third-octave noise Reception filter: third-octave																														
Test report no.: CT190509B SA Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH (Dr.-Ing. A. Siebel) (Dr.-Ing. L. Siebel)																												

4.1 Valuation of test results		Enclosure SA														
Soundabsorber for the application in buildings - valuation of sound absorbtion Sound absorption of DIN EN ISO 11654 : 1997- 07		Page 3 of 4														
Customer: CENTEXBEL																
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m² laid loose on the floor of the reverberation room																
frequency - range of the "shapeindicators" L M M H H		<table border="1"> <thead> <tr> <th>Frequency in Hz</th> <th>pactical sound absorption coefficient</th> </tr> </thead> <tbody> <tr> <td>125</td> <td>0,00</td> </tr> <tr> <td>250</td> <td>0,00</td> </tr> <tr> <td>500</td> <td>0,05</td> </tr> <tr> <td>1000</td> <td>0,15</td> </tr> <tr> <td>2000</td> <td>0,30</td> </tr> <tr> <td>4000</td> <td>0,40</td> </tr> </tbody> </table>	Frequency in Hz	pactical sound absorption coefficient	125	0,00	250	0,00	500	0,05	1000	0,15	2000	0,30	4000	0,40
Frequency in Hz	pactical sound absorption coefficient															
125	0,00															
250	0,00															
500	0,05															
1000	0,15															
2000	0,30															
4000	0,40															
Results: ———— Relation - curve: ————																
Reverberation room: Basic plan: trapezoid Volume: 211 m³ Temperature: 20 °C Humidity: 65 %																
Surfaces areas of reverberation room: 213 m² Surfaces areas of reflectors in reverberation room: 54,5 m²																
																
Evaluated sound absorptions grade α_w $\alpha_w : 0,15 (- - H) ^{*}$ *) It is recommended insisently to use this singular valuation with complete curve of sound absorption garde.																
Test report no.: CT190509B SA Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH (Dipl.-Ing. A. Siebel) (Dipl.-Ing. L. Siebel)														

4.2 Test results		Enclosure SA																																																									
Reverberation times Measurement of sound absorption in a reverberation room Customer: CENTEXBEL		Page 4 of 4																																																									
Tested material: article: T905007 Test room: reverberation room, Hauptstraße 133, 52 477 Alsdorf Test area: 12,0 m² Test method: method of reverberation room Date of test: 19.05.2009 Description of the test material: Total thickness: - mm Mass / area: - kg/m² laid loose on the floor of the reverberation room Dimension of the test area: length: 4,00 m width: 3,00 m Reverberation times: <table border="1"> <thead> <tr> <th>f / Hz</th> <th>T1 / s</th> <th>T2 / s</th> </tr> </thead> <tbody> <tr><td>100</td><td>9,96</td><td>9,91</td></tr> <tr><td>125</td><td>7,82</td><td>7,79</td></tr> <tr><td>160</td><td>6,73</td><td>6,48</td></tr> <tr><td>200</td><td>7,29</td><td>7,10</td></tr> <tr><td>250</td><td>7,20</td><td>6,98</td></tr> <tr><td>315</td><td>6,22</td><td>5,95</td></tr> <tr><td>400</td><td>6,57</td><td>6,02</td></tr> <tr><td>500</td><td>6,89</td><td>6,00</td></tr> <tr><td>630</td><td>6,93</td><td>5,87</td></tr> <tr><td>800</td><td>6,55</td><td>5,39</td></tr> <tr><td>1000</td><td>6,48</td><td>5,00</td></tr> <tr><td>1250</td><td>6,31</td><td>4,34</td></tr> <tr><td>1600</td><td>5,93</td><td>3,79</td></tr> <tr><td>2000</td><td>5,42</td><td>3,38</td></tr> <tr><td>2500</td><td>4,65</td><td>3,05</td></tr> <tr><td>3150</td><td>3,99</td><td>2,68</td></tr> <tr><td>4000</td><td>3,24</td><td>2,26</td></tr> <tr><td>5000</td><td>2,59</td><td>1,86</td></tr> </tbody> </table>			f / Hz	T1 / s	T2 / s	100	9,96	9,91	125	7,82	7,79	160	6,73	6,48	200	7,29	7,10	250	7,20	6,98	315	6,22	5,95	400	6,57	6,02	500	6,89	6,00	630	6,93	5,87	800	6,55	5,39	1000	6,48	5,00	1250	6,31	4,34	1600	5,93	3,79	2000	5,42	3,38	2500	4,65	3,05	3150	3,99	2,68	4000	3,24	2,26	5000	2,59	1,86
f / Hz	T1 / s	T2 / s																																																									
100	9,96	9,91																																																									
125	7,82	7,79																																																									
160	6,73	6,48																																																									
200	7,29	7,10																																																									
250	7,20	6,98																																																									
315	6,22	5,95																																																									
400	6,57	6,02																																																									
500	6,89	6,00																																																									
630	6,93	5,87																																																									
800	6,55	5,39																																																									
1000	6,48	5,00																																																									
1250	6,31	4,34																																																									
1600	5,93	3,79																																																									
2000	5,42	3,38																																																									
2500	4,65	3,05																																																									
3150	3,99	2,68																																																									
4000	3,24	2,26																																																									
5000	2,59	1,86																																																									
Number of loudspeaker positions: 2 Number of microphone positions: 2 x 6		Test sound: third-octave noise Reception filter: third-octave																																																									
Test report no.: CT190509B SA Aachen 27.05.2009		SWA Schall- und Wärmemeßstelle Aachen GmbH 																																																									





FACULTEIT INGENIEURSWETENSCHAPPEN
Vakgroep TEXTIELKUNDE
Technologiepark 907, B-9052 Gent (Zwijnaarde)
T +32 9 264 57 35 - F +32 9 264 58 46
<http://textiles.UGent.be>
textiles@UGent.be

T.a.v. Hilde Depypere
Centexbel
Technologiepark 7
9052 Zwijnaarde

contact
Didier Van Daele

e-mail
didier.vandaele@UGent.be

date
29/05/2009

TEST REPORT 09-297 B

Samples received :

Order 7489: T905007
Received on 12/05/09

Aim of the test :

determination of applicability with floorheating

Test conditions :

Applicability with floorheating by means of TECOSY : one plate method

Standard: DIN 52 612 part 1 (1979)* in accordance with ISO 8302 (1991)*
Method: A sample is placed between a cold and a warm plate. The cold and the warm plate are kept at the same temperature. The quantity of energy needed to keep the warm and cold plate on temperature, is an indication for the heat transmission of the sample.
Number of tests: 2 samples (3 measurements per sample)
Test conditions: $20 \pm 2^{\circ}\text{C}$ and $65 \pm 4\%$ relative humidity

The tests were ended in week 22/2009

The test results only apply to materials that correspond to the tested sample. Forgery will be legally prosecuted, just like partial reproduction without prior written permission. Tests that are marked *are accredited, those marked * are not accredited. Advices and interpretations are not covered by the accreditation.

The department of Textiles is Notified laboratory n°1611 for the European Products directive 89/106/EC.

p. 1/2
09-297 B

Independent Textile
Testing
Service, Inc.

Test Number: 187668-1

PO Box 1948 - 1503 East Morris Street - Dalton, GA 30722
Phone: 706-278-3013 • Fax: 706-272-7057 • E-mail: info@ittslab.com

Test Report

Customer: Standard Carpet Ind. L.L.C.

February 27, 2018


Subject: Specimens of the submitted sample were prepared and tested in accordance with
ASTM E 648-15e1 and/or Federal Test Method 372. NFPA 253FLOORING RADIANT PANEL TESTSample Description

100% Solution Dyed Olefin Carpet Tile with PVC Backing

Test AssemblyMounted on 6mm FRC Board
(Using Premium Multi Purpose Adhesive)

Test Results	Specimen No. 1	Specimen No. 2	Specimen No. 3
Critical Radiant Flux	0.24 watts/cm ²	0.25 watts/cm ²	0.24 watts/cm ²
Total Burn Length	61.0 cm	60.0 cm	61.0 cm
Flame Front Out	60.0 minutes	62.0 minutes	60.0 minutes

<u>Average Critical Radiant Flux</u>	0.24 watts/cm ²
Estimated Standard Deviation	0.01 watts/cm ²
	2.4% coefficient of variation



President L. Kent Suddeth

Page 1 of 1

Our letters and reports are for the exclusive use of the customer to whom they are addressed, and their communication to any others or the use of the name of Independent Textile Testing Service, Inc., must receive our prior written approval. Our letters and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The reports and letters and the name of Independent Textile Testing Service, Inc., are not to be used under any circumstances in advertising to the general public.

Page 1 of 1

WWW.Kiliet.com

Kiliet

Standard Carpets